

3-17-00

Case Docket No. FUJH 16.870  
Filed by Express Mail  
(Receipt No. EL522353745) PTO  
on March 16, 2000  
pursuant to 37 CFR 1.10  
by Lydia Gonzalez

jc525 U.S. PTO  
09/526619  
03/16/00

THE COMMISSIONER OF PATENTS AND TRADEMARKS  
Washington D.C. 20231  
Box Patent Applications

S I R:

Transmitted herewith for filing is: ☒ a new application  
☐ a c-i-p application of S.N. \_\_\_\_\_ filed \_\_\_\_\_

Inventor(s): Akihiro YAMORI; Takashi HAMANO; Kiyoshi SAKAI; Kouji YAMADA

For: MOVING PICTURES ENCODING METHOD AND APPARATUS

Enclosed are:

- ☒ 18 sheets of drawings.(Figs. 1-10,11A,11B,12-31)
- ☒ Specification, including claims and abstract ( 58 pages)
- ☒ Declaration
- ☒ An assignment of the Invention to FUJITSU LIMITED
- ☒ A certified copy of Japanese Application No(s). 11-074497
- ☒ An associate power of attorney
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☒ Post card
- ☒ Recording fee (as indicated below)
- ☒ Information Disclosure Statement, PTO-1449, copies of 2 references
- ☒ Other Preliminary Amendment
- ☐ Other \_\_\_\_\_

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	22-20 =	2
INDEP CLAIMS	13-3 =	10
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

\*If the difference in Col. 1 is less than  
zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$345
x 9 =	\$
X 39 =	\$
x 130 =	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$690
x 18 =	\$ 36
x 78 =	\$780
x 260 =	\$
TOTAL	\$1506

☐ Please charge our Deposit Account No. 08-1634 the amount of \_\_\_\_\_ to cover the filing fee  
and recording fee (if any)

☒ A check in the amount of \$1546.00 to cover the filing fee and the recording fee (if any) is enclosed.

☒ The Commissioner is hereby authorized to charge payment of any fee associated with this communication or  
credit overpayment to Deposit Account No. 08-1634. A duplicate copy of this sheet is enclosed.

Helfgott & Karas, P.C.  
60th Floor  
Empire State Building  
New York, New York 10118-6098  
(212)643-5000

Date: March 16, 2000

Any fee due with this paper, not fully  
covered by an enclosed check, may be  
charged on Deposit Acct No. 08-1634

Respectfully Submitted

- ☐ Aaron B. Karas, Reg. No. 18,923
- ☒ Samson Helfgott, Reg. No. 23,072
- ☐ Leonard Cooper, Reg. No. 27, 625
- ☐ Linda S. Chan, Reg. No. 42,400
- ☐ Jacqueline M. Steady, Reg. No. 44,354
- ☐ Harris A. Wolin , Reg. No. 39,432

THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Akihiro YAMORI et al.

Filed : Concurrently herewith

For : MOVING PICTURES ENCODING METHOD AND APPARATUS

Serial No.: Concurrently herewith

March 16, 2000

Hon. Commissioner of Patents  
and Trademarks  
Washington, D.C. 20231

PRELIMINARY AMENDMENT

S I R:

Prior to examination please amend the application as follows:

**IN THE CLAIMS:**

Please amend the following claims:

Claim 20, line 3, change "according to claims 11 through 13" to --claim 11--.

Kindly add the following new claims 21 and 22:

--21. A moving pictures decoding apparatus, which corresponds to any of the moving pictures encoding apparatus according to claim 12, and which has motion compensating means corresponding to prediction from a forward field motion vector for one field, and from a backward field.

22. A moving pictures decoding apparatus, which corresponds to any of the moving pictures encoding apparatus according to claim 13, and which has motion compensating means corresponding to prediction from a


forward field motion vector for one field, and from a  
backward field.--

**REMARKS**

This amendment is being submitted to avoid improper  
multiple dependent claims.

Favorable consideration is respectfully solicited.

Respectfully submitted,

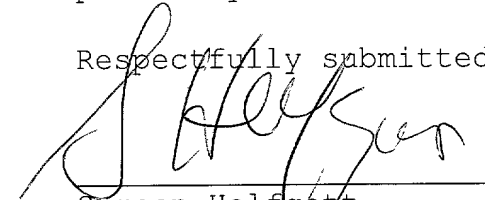  
\_\_\_\_\_  
Samson Helfgott  
Reg. No. 23,072

HELFGOTT & KARAS  
EMPIRE STATE BUILDING - 60th Floor  
NEW YORK, NEW YORK 10118-6098  
(212) 643-5000  
DOCKET NO.: FUJH16.870  
Lhh:preliminary

Filed Via Express Mail  
Rec. No.: EL522353745US  
On: March 16, 2000  
By: Lydia Gonzalez

Any fee due as a result of this  
paper, not covered by an enclosed  
check may be charged on Deposit  
Acct. No. 08-1634.

# MOVING PICTURES ENCODING METHOD AND APPARATUS

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The present invention is related to a moving pictures  
5 encoding method, and an apparatus that uses same, which are  
applied to digital picture systems and applications, and  
picture databases utilized in a variety of fields, such as  
communications, broadcasting, data storage, and computers,  
and more particularly to a moving pictures encoding method,  
10 and an apparatus that uses same, which are advantageous  
when encoding picture data containing a scene change.

### 2. Description of the Related Art

In general, the amount of information comprising a  
moving pictures itself is huge. For this reason, when  
15 encoding moving pictures, redundancy along a spatial axis  
is removed by using an orthogonal transform (discrete  
cosine transform) process and variable-length encoding. In  
addition, redundancy along a time axis is removed by  
finding the difference between the first and last frames,  
20 and encoding the difference data.

The constitution of a picture will be described here  
in order to understand the following explanation.

An interlaced picture, for which every other line of a  
single frame is scanned, and which constitutes an even  
25 field constituting only even-numbered scanning lines, and  
an odd field constituting only odd-numbered scanning lines,  
is currently used in TV formats (NTSC: National Television

System Committee of the United States, PAL: Phase  
Alternation by Line of Europe).

MPEG-2 (Moving Pictures Experts Group) is an encoding  
scheme, which also corresponds to the encoding of  
5 interlaced pictures, and performs encoding, which takes  
frame/field into consideration for picture structure, and  
inter-picture motion prediction. These will be explained  
hereinbelow.

With MPEG-2, both frame allocation and field  
10 allocation are possible for a picture. When a frame is  
allocated as a picture, it is called a frame structure, and  
when a field is allocated, it is called a field structure.  
Encoding is performed by treating a picture as macro-block  
(MB) units.

15 Fig. 26 shows a frame structure macro-block MB1, and a  
field structure odd field macro-block MB2, and even field  
macro-block MB3. Each macro-block (MB) constitutes, for  
example, 16 x 16 pixels.

With MPEG-2, there is also frame prediction and field  
20 prediction, which are well-suited to encoding an interlaced  
picture, and one motion vector is used for frame  
prediction, and two motion vectors are used for field  
prediction.

Here, methods for the above-mentioned reduction of  
25 temporal redundancy can be broadly divided into 3 encoding  
methods in accordance with the scope of inter-picture  
prediction utilized.

The first is an intra-picture encoding method, wherein encoding is performed within a picture, the second is an inter-picture sequential predictive encoding method, wherein encoding is performed by also using inter-picture forward prediction. In addition, the third is a bi-directional predictive encoding method, wherein encoding is performed using two-directional inter-picture prediction, which combines the forward direction and the backward direction.

10 A picture by the above-mentioned first encoding method is called an I-picture (Intra-Picture), a picture by the second encoding method is called a P-picture (Predictive-Picture), and a picture by the third encoding method is called a B-picture (Bi-directionally predictive-Picture).

15 Further, from the standpoint of whether or not each type of picture can be used as an inter-picture predictive reference picture from another picture, an I-picture and a P-picture are referenced, but a B-picture is not referenced. Accordingly, an I-picture and a P-picture  
20 collectively are called a reference picture.

Furthermore, because the degree of temporal correlation is great between each picture of moving pictures, more redundancy can be removed from a P-picture, which utilizes a correlation with a forward picture, than  
25 from an I-picture. Further, more redundancy can be removed from a B-picture, which utilizes a correlation with a backward picture, than from a P-picture.

That is, viewed from the amount of data of pictures of the same picture quality, it is a relationship wherein an I-picture > P-picture > B-picture. Also, because a reference picture can at the least be used in motion prediction from another picture, and can constitute the original picture from which a predictive frame is generated, it is desirable that a reference picture be of the highest picture quality possible.

In this sense as well, a reference picture > non-reference picture is desirable with regard to amount of data.

However, efficiency cannot be said to be good if encoding is performed using only a P-picture or a B-picture, which have small amounts of data. This is because when an error occurs, the error is propagated temporally with the inter-picture encoding of a P-picture or B-picture.

Consequently, since this causes problems, it is desirable to refresh periodically with an I-picture. Actually, when encoding using a B-picture, it is common to perform encoding by changing the picture type, as shown in Fig. 27.

In Fig. 27, B indicates a B-picture, I indicates an I-picture, and P indicates a P-picture, and the same holds true for the other figures described hereinbelow. Further, an arrow of inter-picture prediction signifies that the predictive frame of the picture at the tip of an arrow is

generated using the picture at the base of the arrow.

Incidentally, the size of the Group-of-Pictures (GOP) in the example of Fig. 27 is 12 pictures, that is, I-picture refresh is performed every 12 pictures. And the distance between each reference picture is 3 pictures.

Furthermore, inter-picture prediction is performed in macro-block units, which divide a picture into a plurality of blocks as described above, and determines the difference between a pixel unit and a block, wherein a coded picture macro-block is the same size as a reference picture.

And then, the cumulative sum thereof is treated as a prediction error, the block with the smallest prediction error is selected, and a predictive frame is generated. Next, difference data with an encoded macro-block is encoded. As the difference, the sum of absolute values of a simple pixel difference, the sum of squares of a pixel difference, and the like are utilized.

Here, when an I-picture is put to multiple uses, it is undesirable because the same scene is coded at the same picture quality, thereby increasing the amount of coded data. When encoding is performed at a fixed rate, picture unit data allocation becomes that much smaller, and picture quality deteriorates.

However, when scene changes and other inter-picture correlation is low, prediction efficiency deteriorates when inter-picture prediction is used, and in some cases, picture quality deteriorates even more than when intra-

picture encoding is performed.

Therefore, as a measure against such trouble, there has been proposed a method, wherein, even when encoding is performed using an I-picture at a certain fixed interval, when a scene change SC is detected as shown in Fig. 28, the immediately succeeding picture is coded using I-picture intra-picture encoding.

When all is said and done, this method is undesirable because an I-picture, or an intra-picture coded picture is generated each time a scene change occurs, increasing the volume of coded data by that much.

Further, so as to prohibit to the utmost an increase in the frequency of an I-picture, as shown in Fig. 29, when a scene change occurs, the count value of the heretofore I-picture fixed interval cycle is reset. Then, there is a method, wherein GOP is once again reconfigured from the picture at reset time, and encoding is performed using a fixed interval cycle I-picture (for example, GOP size = 12).

It might also be possible to have a method, wherein, when a scene change is generated in a B-picture as shown in Fig. 30, intra-picture prediction is held not with the B-picture thereof, but by making the reference picture that comes immediately thereafter in the input sequence either an I-picture or intra-frame encoding, and using inter-picture prediction from preceding and succeeding reference pictures.

However, in the case of the example shown in Fig. 30, if it is assumed that the encoding process is achieved in real-time using hardware, to include input-output apparatus in particular, there is absolutely no way of predicting the cycle at which a reference picture will appear. Therefore, picture memory management becomes more difficult than when a reference picture appears at a fixed cycle.

Further, when viewed from the aspect of data allocation, changing from a P-picture to an I-picture causes much less fluctuation of data allocation than changing from a B-picture to an I-picture, making it less likely that a stream buffer will exhibit an underflow or overflow state. As a result, the method of Fig. 30 is considered desirable.

However, even a control method like that shown in Fig 30 has problems such as those hereinbelow.

Here, Fig. 31 is a diagram prepared for explaining the problem points in this Fig. 30. To simplify the explanation, nothing is shown other than a B-picture, which is an encoded picture, a forward reference picture, and a backward reference picture.

In general, in the case of a frame structure, in which a frame is encoded as a picture, inter-frame prediction and inter-field prediction are performed as inter-picture prediction.

More specifically, there are 3 forms of prediction in frame prediction: forward prediction, backward prediction,

and bi-directional prediction, in which prediction is performed using a picture that combines predictive pictures obtained by predictions in both directions thereof.

Similarly, in inter-field prediction as well, there are 3 forms of prediction: forward prediction, backward prediction, and bi-directional prediction, in which prediction is performed using a picture that combines predictive pictures obtained by predictions in both directions thereof.

Of the reference numbers of the motion vectors shown in Fig. 31, the numbers 5, 10 are frame vectors. Numbers 1, 2, 3, 4, 6, 7, 8, 9 are field predictions. Furthermore, in Fig. 31, the right field is the odd-numbered field, and the left field is shown as the even field.

In frame prediction, when using forward prediction, the vector that is selected is number 5, and when using backward prediction, the vector that is selected is the number 10 vector. When using bi-directional prediction, both the number 5 and 10 vectors are used.

Conversely, in field prediction, a predictive frame is generated using a motion vector in each of the odd and even fields.

In the case of forward prediction, the B-picture odd field generates a predictive frame using either the number 1 or 2 motion vector, and the even field generates a predictive frame using either the number 3 or 4 motion vector.

Similarly, in the case of backward prediction, the odd field uses either the number 6 or 7 motion vector, and the even field uses either the number 8 or 9 motion vector. In the case of bi-directional prediction, the odd field generates a reference frame by combining a forward predictive frame, which is generated using either the number 1 or 2 motion vector, and a backward predictive frame, which is generated using either the number 6 or 7 motion vector.

The even field generates a reference frame by combining a forward predictive frame, which is generated using either the number 3 or 4 motion vector, and a backward predictive frame, which is generated using either the number 8 or 9 motion vector.

The above is a method of motion prediction utilized in current MPEG-2 and other moving pictures encoding schemes. However, when a scene change occurs between the odd/even fields within an interlaced frame, the algorithms of current moving pictures encoding schemes only perform frame structure encoding, and in field prediction, one field is not able to perform forward prediction, while the other field performs backward prediction.

Consequently, in a relevant picture, encoding efficiency drops excessively, and picture quality deterioration becomes conspicuous. Further, since prediction is not applied between pictures, if there is an increase of macro-blocks, for which intra-picture encoding

is performed using a B-picture, the significance of creating a reference picture of immediately thereafter using an I-picture or intra-picture encoding is also lost.

#### SUMMARY OF THE INVENTION

5           Therefore, an object of the present invention is to provide a moving pictures encoding method and apparatus, which are capable of achieving encoding efficiency and good picture quality encoding even when there exists a picture so that a scene change occurs between the odd/even fields within an interlaced frame.

10           Further, an object of the present invention is to provide a moving pictures encoding method and apparatus, which achieve good encoding efficiency and picture quality in accordance with adding a prediction mode, and  
15           appropriately switching encoding schemes, and switching input data.

          As a first constitution of a moving pictures encoding method and apparatus of the present invention, which achieves the above-mentioned goals, is a method and  
20           apparatus, which performs moving pictures encoding having a picture, which treats a frame of input signals of an interlaced image as a picture, and which predicts and encodes this picture in macro-block units from both a forward picture, which is temporally in the past, and a  
25           backward picture, which is in the future, this method and apparatus being characterized in that, when encoding is performed by predictions from the above-mentioned bi-

directional pictures, there is performed motion prediction between fields, which treat as a unit a field, which divides each picture in macro-block units into either odd numbers or even numbers of pixel scanning lines of this frame, and as a predictive mode, the use of prediction from either the forward field motion vector for one field, or the backward field motion vector for the other field is selected and switched in picture units, a predictive picture corresponding to this selected predictive mode is generated, and the above-mentioned input signals are encoded using the generated predictive picture.

As a second constitution, a moving pictures encoding method and apparatus are characterized in that, when encoding is performed by a prediction from the above-mentioned bi-directional picture, there is performed motion prediction between fields, which treat as a unit a field, which divides each picture in macro-block units into either odd numbers or even numbers of pixel scanning lines of this frame, and as a predictive mode, predictions from the forward field motion vector for one field, and the backward field motion vector for the other field are constantly used, a predictive picture corresponding to the above-mentioned predictive mode is generated, and input signals are encoded using the generated predictive picture.

Furthermore, the moving pictures encoding method and apparatus according to the first constitution is characterized in that a scene change of the above-mentioned

input signal picture is detected in a field unit divided into either odd numbers or even numbers of pixel scanning lines of the above-mentioned frame, and relative to a picture, in which a scene change exists between fields within the above-mentioned frame in the above-mentioned input signal picture, a prediction from a forward field motion vector for one field, and a backward field motion vector for the other field are treated as a selection item.

Further, as a fourth characteristic, a moving pictures encoding method and apparatus, which performs encoding by treating an interlaced image as input signals, and treating a macro-block as a unit, this moving pictures encoding method and apparatus being characterized in that a scene change on the above-mentioned input signal picture is detected in a field unit divided into either odd numbers or even numbers of pixel scanning lines of a frame, and the fields of the above-mentioned input signal picture are encoded as pictures for a picture, for which inter-picture prediction is performed at the least from both a forward picture that is temporally in the past, and a backward picture that is in the future, and for a picture, in which a scene change exists between intra-frame fields in the above-mentioned input signal picture.

As a fifth characteristic, a moving pictures encoding method and apparatus, which performs encoding by treating an interlaced image as input signals, and treating a macro-block as a unit, this moving pictures encoding method and

apparatus being characterized in that a scene change on the above-mentioned input signal picture is detected in a field unit divided into either odd numbers or even numbers of pixel scanning lines of a frame, and for a picture, for which inter-picture prediction is performed from both a forward picture that is at least temporally in the past, and a backward picture that is in the future, and either the above-mentioned forward picture, or backward picture is encoded as the same data for a picture, in which a scene change exists between intra-frame fields in the above-mentioned input signal picture.

Furthermore, as a sixth characteristic, the moving pictures encoding method and apparatus according to the fifth characteristic, are characterized in that encoding, which treats the above-mentioned picture as the same data as either a forward reference picture or a backward reference picture, is performed by fixing the encoding prediction direction to one direction frame prediction, making the motion vector always equal 0, and also making the encoding difference data always equal 0.

And furthermore, as a seventh characteristic, the moving pictures encoding method and apparatus according to the fifth characteristic, are characterized in that encoding, which treats the above-mentioned picture as the same data as either a forward reference picture or a backward reference picture, sets either a forward reference picture or a backward reference picture as the current

frame picture when setting the coded original picture.

Further, as an eighth characteristic, a moving pictures encoding method and apparatus, which inputs an interlaced picture as an input signal, this method and apparatus being characterized in that a scene change on the above-mentioned input signal picture is detected in a field unit divided into either odd numbers or even numbers of pixel scanning lines of a frame of this picture, and one field is repeatedly outputted relative to a picture, in which a scene change exists between intra-frame fields in the above-mentioned input signal picture.

As a ninth characteristic, a moving pictures encoding method and apparatus, which performs encoding by treating a frame of input signals of an interlaced image as a picture, and by treating a macro-block as a unit, this moving pictures encoding method and apparatus being characterized in that a scene change on the above-mentioned input signal picture is detected in a field unit divided into either odd numbers or even numbers of pixel scanning lines of a frame, and one field of a picture is repeatedly outputted when this picture is such that prediction is performed from both a forward picture that is temporally in the past, and a backward picture that is in the future, and a scene change exists between intra-frame fields in these input signals.

As a tenth characteristic, a moving pictures encoding method and apparatus according to any of the first through the third characteristics, are characterized in that there

is performed motion compensation, which corresponds to  
encoded moving pictures encoding, and which corresponds to  
prediction from a forward field motion vector for one  
field, and a backward field motion vector for the other  
5 field.

Further characteristics of the present invention will  
become clear from the hereinbelow description in accordance  
with the figures of the aspects of the embodiments of the  
invention.

#### 10 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram illustrating a first solution  
principle of the present invention;

Fig. 2 is a diagram illustrating a second solution  
principle of the present invention;

15 Fig. 3 is a diagram illustrating a third solution  
principle of the present invention;

Fig. 4 is a diagram illustrating a fourth solution  
principle of the present invention;

Fig. 5 is a block diagram of an example of a common  
20 constitution of an encoding apparatus to which a solution  
principle of the present invention is applied;

Fig. 6 is a block diagram showing an example of a  
constitution of the motion searching device 5 in the  
constitution of Fig. 5;

25 Fig. 7 is a block diagram of an example of a  
constitution of the sums of absolute values of differences  
arithmetic circuit 51-5m of Fig. 6;

Fig. 8 is a block diagram of an example of a motion prediction decision device 6;

Fig. 9 is a block diagram of an example of a constitution of a motion prediction decision device 6, which, as a first embodiment of the present invention, realizes the first solution principle of the present invention;

Fig. 10 is a block diagram of an example of a constitution of a motion prediction decision device 6 according to a second embodiment of the present invention;

Figs. 11A and 11B are diagrams illustrating the physical relationship of an odd field and an even field;

Fig. 12 is a diagram illustrating a third embodiment of the present invention;

Fig. 13 is a diagram illustrating a fourth embodiment of the present invention;

Fig. 14 is a block diagram of an example of a constitution of a scene change detecting circuit 65 in the embodiment of Fig. 13;

Fig. 15 is a diagram illustrating a detection algorithm of the scene change detecting circuit 65 of Fig. 13;

Fig. 16 is a diagram showing the relationship of a first field F1 and a second field F2 in the algorithm of Fig. 15;

Fig. 17 is a diagram illustrating a fifth embodiment of the present invention;

Fig. 18 is a diagram illustrating a sixth embodiment of the present invention;

Fig. 19 is an example of a constitution of the frame memory readout circuit 67 of Fig. 18;

5 Fig. 20 is a diagram illustrating a seventh embodiment of the present invention;

Fig. 21 is a diagram illustrating an eighth embodiment of the present invention;

10 Fig. 22 is an example of a constitution of the pre-processing circuit 68 of Fig. 21;

Fig. 23 is a block diagram of an example of a constitution of a decoding apparatus corresponding to an encoding apparatus based on the solution principles illustrated by Fig. 1-Fig. 4;

15 Fig. 24 is a diagram illustrating the significance of top#field#first#flag in field prediction of the present invention;

Fig. 25 is a block diagram of an example of a constitution of the bi-directional motion compensating circuit 105 of Fig. 23;

Fig. 26 is a diagram illustrating a picture;

Fig. 27 is a diagram illustrating the changing of a picture type when encoding using a B-picture;

25 Fig. 28 is a diagram illustrating a method, wherein the immediately succeeding picture of when a scene change SC is detected is encoded using an I-picture or other intra-picture encoding scheme;

Fig. 29 is a diagram illustrating a method, wherein the count value of an I-picture fixed interval cycle is reset when a scene change occurs so as to prohibit I-picture frequency from increasing as much as possible;

5 Fig. 30 is a diagram illustrating a method, wherein, when a scene change occurs in a picture, the reference picture that comes immediately thereafter in the input sequence uses either an I-picture or intra-frame encoding; and

10 Fig. 31 is a diagram for describing the problem points in Fig. 29.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Aspects of the embodiments of the present invention will be described hereinbelow in accordance with the figures. Furthermore, the same or similar parts in the figures will be described by appending the same reference numeral or reference symbol.

15 Fig. 1 is a diagram illustrating a first solution principle of the present invention. In the figure, P, B, and I, respectively, indicate a P-picture, B-picture, and I-picture, as was explained in Fig. 26 through Fig. 31 above.

20 The characteristic of the solution principle of Fig. 1 lies in the fact that a prediction mode is added at the time of a B-picture during frame structure encoding. Enabling the carrying out of prediction, wherein one field is forward prediction, and the other field is backward

prediction, makes it possible to perform prediction efficiently.

In Fig. 1, as is clear from comparison with Fig. 31, the B-picture of the odd field performs forward prediction, and the B-picture of the even field performs backward prediction. That is, prediction is possible when the odd field uses either the 1 or 2 motion vector, and when the even field uses either the 8 or 9 motion vector.

Furthermore, in encoding, when a motion prediction mode is added, a decodable decoding scheme must be prepared even when the prediction mode added thereto is included.

Next, a second solution principle according to the present invention is a method, which does not add a prediction mode. Fig. 2 is a diagram illustrating the second solution principle of the present invention. The second solution principle is a method, wherein, in a B-picture, in which a scene change is detected at the least between fields within a relevant frame, field structure encoding is performed as two field pictures for this frame.

That is, as shown in Fig. 2, when a scene change is detected between the odd/even fields of a B-picture, the odd/even fields of the B-picture thereof undergo encoding processing as two field pictures.

So doing enables inter-picture prediction, wherein one field of the two fields is forward prediction, and the other field is backward prediction, making it possible to perform efficient prediction.

Furthermore, as a third solution principle of the present invention, there is a case, in which a prediction mode is not added, and a picture structure is not changed. In this case, because it is impossible to perform efficient inter-picture prediction, a coded picture is pasted via inter-picture prediction to either a forward or a backward reference frame, or input signals are manipulated, and encoding is performed as a frame that differs from the actual original picture.

This enables encoding which does not reduce encoding efficiency. For example, as shown in Fig. 3, in a picture (in Fig. 3, picture B), in which a scene change occurs at the least between intra-frame fields, a coded frame is encoded so that the picture thereof constitutes the same data as that of either a forward reference picture or a backward reference picture.

In the case of Fig. 3, encoding is performed so that the picture constitutes the same data as a forward reference picture. That is, as shown in Table 1, in the encoding of input of picture B, encoding is performed so that picture B constitutes the same data as picture A. However, especially when a plurality of sequential B-pictures exist, it is desirable to presume that [picture B] is the same data as the closest reference picture.

Table 1: Third Solution Principle of the Present Invention

Input	Picture A	Picture B	Picture C
Encoded Data	Picture A	Picture A	Picture C

Further, viewed over time, when another B-picture exists between a B-picture to be coded and a reference picture, it is desirable to also encode the pertinent B-picture as the same data as the reference picture. This is  
5 to maintain the continuity of a picture when an encoded stream is reproduced.

As a method for encoding a picture as a frame that differs from the actual encoded picture, there is yet another method according to the present invention. This is  
10 a method, wherein, when a scene change is detected between intra-frame fields as shown in Fig. 4, one of the fields of the picture thereof is repeated for the pertinent frame.

In the scene following repetition in accordance therewith, a scene change can be made in frame units.  
15 Encoding efficiency increases as a result thereof. This method of repeating one field can be carried out by looking only at input data that is not particularly related to encoding.

Next, embodiments for realizing the above-mentioned  
20 solution principles of the present invention will be described. But prior to the descriptions thereof, to make it easier to understand the present invention, an example of a common constitution of an encoding apparatus, to which a solution principle of the present invention is applied,  
25 will be described.

Fig. 5 shows a block diagram of an example of a common constitution of an encoding apparatus to which a solution

principle of the present invention is applied. The sequence of an I-picture, P-picture, and B-picture is controlled in accordance with an encoding controller 1, and in correspondence therewith, switches SW1, SW2 switch to either the intra-picture encoding (intra) side, or the inter-picture encoding (inter) side.

An encoder 2 is constituted from an orthogonal transform circuit and a quantizing circuit. In accordance therewith, spatial compression, and data structure-based data quantity reduction are possible. An MPEG-coded data stream is outputted from the encoder 2.

Conversely, the output of the encoder 2 is inputted to a decoder 3, and a decoding process corresponding to the encoding process of the encoder 2 is performed. Then, the decoded picture data is stored in frame memory 4, and utilized in motion search and motion compensation processing.

An example of a constitution of a motion searching device 5 is shown in Fig. 6, and has m-number of sums of absolute values of differences arithmetic circuits 51-5m, into which respective data from m-number of macro-blocks, which constitute the reference picture search range shown in Fig. 27, are inputted, and a comparator 50 for inputting the output of m-number of sums of absolute values of differences arithmetic circuits 51-5m, and selecting and outputting a minimum value.

Here, the above-mentioned m-number of macro-blocks are

produced by shifting horizontally, and vertically one pixel at a time in a reference picture search range, having, for example, 16 x 16 pixels as one macro-block unit.

Each pixel of an original picture macro-block is  
5 inputted in common to the respective input terminals of the sums of absolute values of differences arithmetic circuits 51-5m.

The sums of absolute values of differences arithmetic circuits 51-5m of Fig. 6 have a constitution that is common  
10 to all, and a block diagram of an example of the constitution thereof is shown in Fig. 7. The constitution shown in Fig. 7 has absolute value arithmetic circuits 521-52N, and difference circuits 511-51N of a number corresponding to the number of pixels N constituting a  
15 single macro-block.

Furthermore, the constitution has a cumulative adder 501, which cumulatively adds the outputs of the absolute value arithmetic circuits 521-52N. Here, when one macro-block constitutes 16 x 16 pixels as described above, N is  
20 246.

The comparator 50 in Fig. 6 is inputted with outputs from the sums of absolute values of differences arithmetic circuits 51-5m, which correspond to the plurality m-number of macro-blocks, and selects the output of the sums of  
25 absolute values of differences arithmetic circuits 51-5m with the minimum value.

That is, in the reference picture search range, the

macro-block with the strongest correlation to the original picture macro-block is selected, and a motion vector (quantity of movement) and sum of absolute values of differences are outputted as motion search results.

5           Furthermore, a motion prediction decision device 6, in outputting the minimum value of the sums of absolute values of differences between a reference picture and an original picture as described above, the minimum value of the sums of absolute values of differences in the forward direction, 10           that is, with a past reference picture, the minimum value of the sums of absolute values of differences in the backward direction, that is, with a future reference picture, and the minimum value of the sums of absolute values of differences with reference pictures in both 15           directions are outputted.

          Furthermore, for sums of absolute values of differences with a reference picture, a frame sum of absolute values of differences is outputted in the case of frame prediction, and a field prediction sum of absolute 20           values of differences is outputted in the case of field prediction.

          Here, the sum of absolute values of differences of a frame prediction is the 16 x 16 pixel sum of absolute values of differences minimum value in the above-mentioned 25           example, and sum of absolute values of differences of a field prediction is the sum of an odd 16 x 8 pixel scanning line sum of absolute values of differences minimum value

and an even 16 x 8 pixel scanning line sum of absolute values of differences.

These absolute values of differences are inputted to the motion prediction decision device 6. Fig. 8 is a block diagram of an example of a constitution of a motion prediction decision device 6. There are prediction comparators 60, 61, and 62 corresponding to forward prediction, backward prediction, and bi-directional prediction. Each prediction comparator compares a frame prediction sum of absolute values of differences against a field prediction sum of absolute values of differences, and outputs the smallest thereof.

Meanwhile, the switching selection of either P-picture encoding or B-picture encoding is controlled in accordance with control by the encoding controller 1. At P-picture encoding, either the frame prediction sum of absolute values of differences, or the field prediction sum of absolute values of differences selected by prediction comparator 60 is outputted as the prediction result.

Further, at B-picture encoding, the outputs of prediction comparators 60, 61, and 62 are inputted into prediction comparator 63, the minimum value thereof is selected, and outputted as the output of the motion prediction decision device 6.

The prediction decision types and motion vectors in a motion prediction decision device 6 are as shown in Table 2 hereinbelow.

Table 2: Relation Between Prediction Type and Number of  
Vectors

	Forward Prediction		Backward Prediction		Bi-directional Prediction	
Predic- tion Type	Frame	Field	Frame	Field	Frame	Field
MV Count	1	2	1	2	2	4
MV Count/ Direc- tion	1	2	1	2	1	2

5           The output of the motion prediction decision device 6  
is switched at inter-picture encoding to the difference  
circuit 7 by switch SW1 in accordance with encoding  
controller 1. Therefore, the difference between the input  
picture data and the prediction result of the motion  
10 prediction decision device 6 is outputted by the difference  
circuit 7, and inputted to the encoder 2.

Next, a constitution, which realizes a solution  
principle of the present invention described in Fig. 1  
through Fig. 4 of the present invention will be described  
15 relative to the common encoding apparatus of the above-  
mentioned Fig. 5 through Fig. 8.

Fig. 9 is a block diagram of an example of a

constitution of a motion prediction decision device 6,  
which, as a first embodiment of the present invention,  
realizes the above-mentioned first solution principle of  
the present invention. The present invention is  
5 characterized by the fact that it provides yet another  
prediction comparator 64 relative to the constitution of  
the motion prediction decision device 6 of Fig. 8.

Frame structure encoding realized by the embodiment  
shown in Fig. 9, as the first solution principle of the  
10 present invention illustrated in Fig. 1, adds a predictive  
mode, which, in B-picture field prediction, performs  
prediction from the forward direction for one field, and  
prediction from the backward direction for the other field.

To add this predictive mode, there is a possibility  
15 that an additional bit will be required in a macro-block  
unit from the standpoint of the syntax (data string  
convention). Therefore, this predictive mode is  
advantageous in that the constitution enables ON/OFF in  
picture units.

20 As a method for same, there is selected motion  
prediction, which performs prediction from the forward  
direction for one field, and from the backward direction  
for the other field, just like the frame prediction and  
field prediction performed by the motion prediction of  
25 heretofore, and which also computes the prediction error of  
1 direction 1 vector field prediction, and shows the  
minimum prediction error via prediction comparator 63.

Furthermore, the switch SW in Fig. 9 is provided for switching in accordance with whether or not a prediction mode, wherein prediction is performed from the forward direction for one field, and from the backward direction for the other field, is to be applied in picture field prediction, which uses the bi-directional prediction of the present invention.

Here, the prediction types and number of vectors in the embodiment of Fig. 9 are as shown in Table 3 hereinbelow.

Table 3: Relation Between Prediction Type and Number of Vectors

	Forward Prediction		Backward Prediction		Bi-directional Prediction		
Prediction Type	Frame	Field	Frame	Field	Frame	Field	Field2
MV Count	1	2	1	2	2	4	2
MV Count/ Direction	1	2	1	2	1	2	1

In Table 3, field prediction on the bi-directional

side is conventional, the same as in Table 2. Field 2 prediction on the bi-directional side is added in accordance with the present invention, and there is 1 motion vector per direction. Field 2 prediction therefore has 2 motion vectors for forward/backward prediction.

Fig. 10 is a block diagram of an example of a constitution of a motion prediction decision device according to yet a second embodiment of the present invention. The constitution is such that the output of prediction comparator 64, which is added relative to the embodiment of Fig. 9, is constantly inputted to prediction comparator 63.

Therefore, the constitution is such that, for a B-picture, prediction, which is always from a forward field prediction result for one field, and from a backward field prediction result for the other field, is entered into an item.

As described above, according to the present invention, a prediction mode, wherein there is 1 motion vector per direction in field prediction, is added as a new prediction mode.

Table 4 is a code table for an MPEG-2 frame structure prediction mode (Table 6-17 Meaning of frame#motion#type: ISO/IEC 13818-2 (MPEG-2 Video) definition of frame#motion#type).

Table 4

Code	Spatial Temporal Weight class	Prediction Type	Motion vector count	Mv format	dmv
00		Reserved			
01	0,1	Field- based	2	Field	0
01	2,3	Field- based	1	Field	0
10	0,1,2,3	Frame- based	1	Frame	0
11	0,2,3	Dual-Prime	1	Field	1

Here, to realize the addition of a prediction mode without increasing code bits at all, as shown in Table 5 hereinbelow, this prediction mode can be allocated to code '00', which is allocated to 'reserved' of Prediction type of the above Table 4.

Table 5

00	0,1	Field- based	1	Field	0
----	-----	-----------------	---	-------	---

Here, in the mode to be added, it is possible to have a case in which the odd field (top#field) is forward

prediction, and the even field (bottom#field) is backward prediction, and, contrary thereto, a case in which the even field (bottom#field) is forward prediction, and the odd field (top#field) is backward prediction.

5        To increase motion prediction efficiency when a scene change occurs between intra-frame fields, the field that exists first in terms of input time can perform forward prediction, and the field that exists thereafter in terms of input time can perform backward prediction.

10        With MPEG-2, because an interlaced picture constitutes 1 frame, a 1-bit flag called top#field#first#flag, which exists in Picture encoding extension, can be referenced to determine which field exists first temporally.

15        That is, when the top#field#first#flag = 1, Fig. 11A pertains, and the odd field can perform forward prediction. By contrast, when top#field#first#flag = 0, Fig. 11B pertains, and the even field can perform forward prediction.

20        In other words, since the field that is to perform forward prediction using the newly added field prediction is uniformly decided by the top#field#first#flag, which exists in Picture encoding extension, there is no need to provide a new flag.

25        Further, a motion vector is also a field prediction, and since the vector count is 1 vector for one field, a motion vector can be sent just like in frame prediction.

      In the above-described second embodiment, since no

additional bits are required from the standpoint of the MPEG-2 syntax, it is desirable for this prediction to be ON at all times.

Fig. 12 is a diagram illustrating a third embodiment of the present invention. The constitution of Fig. 12 is such that, relative to the constitution of Fig. 9, the switching of the switch SW is controlled by a field scene change detecting circuit 65.

Now, in relation to the above description of the second embodiment, the '00' of the code column in the above Table 3 becomes a 'reserved' bit in order to make the MPEG start code, which commonly holds a 0 in bit 23 and a 1 in bit 1, a unique word.

Therefore, when it is impossible to allocate a new motion prediction type to '00', either the bits of a frame#motion#type must be increased 1 bit, or a new, at the minimum 1-bit mode identification bit must be provided.

In this case, since motion prediction is performed in macro-block units, for example, even if an additional bit is 1 bit, when conversion is carried out per picture, it constitutes a huge increase in bit quantity. Furthermore, it is very possible that efficiency is raised in accordance with the addition of this bit only in a picture in which a scene change occurs between intra-frame fields.

Therefore, in the third embodiment, when an ON/OFF flag of an additional motion prediction mode in the first embodiment is provided, a scene change occurs between

intra-frame fields, and the picture thereof is a B-picture, the flag thereof is set to ON.

As shown in Fig. 12, a scene changing circuit 65 is provided as a circuit that generates a field scene change detection flag. In accordance therewith, in a B-picture in which a field scene change occurs, there is added a prediction mode such that, using field prediction, prediction is performed from the forward direction for one field, and prediction is performed from the backward direction for the other field.

In accordance with so doing, the additional bits of the code quantity in accordance with a mode addition in a B-picture in which a field scene change does not occur is at the most 1 bit, making it possible to hold the increase of the code quantity in check.

Fig. 13 is a diagram illustrating a fourth embodiment of the present invention. Relative to the constitution of Fig. 5, there is provided a switching circuit 66, which performs the switching of the frame structure and field structure on the encoding input data side. The switching circuit 66 performs switching of the frame structure and field structure when the scene change detecting circuit 65 detects a case in which a scene change occurs between intra-frame fields, and the picture thereof is a B-picture.

When field structure encoding is performed, it is possible, for example, to perform forward prediction for one field picture, and backward prediction for another

field picture, and prediction efficiency does not drop significantly.

Fig. 14 is a block diagram of an example of a constitution of the scene change detecting circuit 65 in the embodiment of Fig. 13. In the figure, the pixel number is the order in which a field is raster scanned, and  $N_{\text{field}}$  signifies the number of pixels in a field.

The scene change detecting circuit 65 is constituted having difference circuits 651-65N, which determine the difference between each pixel of the current field and preceding field in field units, absolute value circuits 661-66N, which determine the absolute values of the outputs of the difference circuits, a cumulative adder 650, which cumulatively adds the outputs of the absolute value circuits 661-66N, and a threshold decision circuit 660, which compares and determines the output of the cumulative adder 650 against a threshold TH.

That is, when the cumulative addition value of the absolute difference of 1 field exceeds the threshold TH, a discrimination decision output is generated from the threshold decision circuit 660.

Fig. 15 is a diagram illustrating a detection algorithm of the scene change detecting circuit 65, which detects a field scene change on the basis of a discrimination decision output from this threshold decision circuit 660. Fig. 16 is a diagram showing the relationship of a first field F1 and a second field F2 in the algorithm

of Fig. 15.

The algorithm of Fig. 15 will be described with reference to this Fig. 16. The presence or absence of a scene change is detected in the first field F1, which is determined by the value of the top#field#first#flag (Step S1). When a scene change is not detected in the first field F1, the presence or absence of a scene change is detected in the second field F2 (Step S2).

At this time, when Step S2 determines that a scene change exists, the scene change is between the first field F1 and the second field F2, as shown in Fig. 16 (Step S3). Therefore, in this case, the scene change is determined to be a field scene change (FIC).

Further, when Step S2 determines that a scene change does not exist, a determination is made that there is no scene change (Step S5).

When there is a scene change in Step S1, next the presence or absence of a scene change is determined for the second field (Step S4). When there is no scene change in the second field, a determination is made that there is no scene change (Step S5). When there is a scene change in the second field, since this constitutes the fact that a scene change extends into the first field as shown in Fig. 16, the scene change is determined to be a frame scene change FRC in this case (Step S6).

Fig. 17 is a diagram illustrating a fifth embodiment of the present invention. This embodiment is characterized

in that the motion prediction mode is limited.

When a scene change occurs between intra-frame fields, and the relevant picture is a B-picture as was described above with regard to the third solution principle, this  
5 embodiment realizes the encoding of an encoded frame as the same data as either a preceding or succeeding reference frame.

In the embodiment of Fig. 17, the constitution is such that the direction of motion vector prediction is fixed in  
10 one direction, frame prediction is fixed, the motion vector is fixed at vector 0, and encoding control is carried out so that even encoding coefficient data is not sent.

In accordance with so doing, an encoded picture can be encoded as the same data as the locally-decoded frame of a  
15 reference picture in accordance with the solution principle illustrated in Fig. 3. The motion vector can also be fixed after all motion mode detection has been performed, and the constitution can also be designed so that no motion prediction mode operation is performed once this mode has  
20 been entered.

According to such a constitution, it is possible to prevent encoding efficiency from becoming extremely poor. In this case, because encoding is performed by treating an encoded picture the same as a reference picture that either  
25 comes before or after a scene change, actually a completely different picture is encoded for one field either before a scene change or after a scene change.

Further, with regard to the reference picture that is treated as the same data as a coded picture, the use of a reference picture that is closer, input time-wise, to a picture in which a scene change occurs is believed to be better, but it need not be limited to this.

Further, when a separate B-picture exists between a scene change-picture and a reference picture, also treating the pertinent B-picture as the same data as a reference picture is desirable from the visual and encoding efficiency standpoints.

Fig. 18 is a diagram illustrating a sixth embodiment of the present invention. This embodiment is characterized by the fact that encoding input data is switched. In the constitution of Fig. 18, a frame memory readout circuit 67 is provided on the data input side, and as a method for treating a coded picture as the same data as a reference picture as in the above-mentioned constitution of Fig. 17, when setting encoding data from an inputted frame, the reference picture to be treated as the same data is set.

Fig. 19 is an example of a constitution of the frame memory readout circuit 67 of Fig. 18. Furthermore, Fig. 19 shows a readout circuit for field 1 input, and since the same constitution is used for field 2, the constitution therefor is omitted from the figure.

The constitution of Fig. 19 has a switch, which is switched in accordance with a scene change detection signal from a scene change detecting circuit 65, and when there is

a B-picture, and a field scene change, the same data as that of either a preceding reference picture or a succeeding reference picture is outputted in accordance with the switch SW. A counter 670 generates the timing for switching I, P, and B-pictures.

With MPEG-2, since a motion search is generally performed here using original pictures, an original of a reference picture can be stored in memory. Further, a post-motion compensation prediction picture is achieved using a locally-decoded picture resulting from the one-time encoding/decoding of a reference picture. Consequently, a decoded reference picture can also be stored in memory.

Therefore, the reference picture set as an original picture here can be set as either an original picture/locally-decoded picture. Further, since the coded frame is changed, the limits of the encoding method shown in the embodiment of Fig. 17 are not particularly necessary.

Here, since the same data as that of a reference picture is used in encoding in the embodiments of Fig. 17, Fig. 18, practically no data is generated in the pertinent picture. Consequently, there is also an effect, whereby data can be allocated to another picture within the GOP.

Fig. 20 is a diagram illustrating a seventh embodiment of the present invention. With this embodiment, the present invention can be applied without necessarily linking up to an encoding apparatus. That is, this

embodiment can be used as an input picture switching apparatus capable of being used in common applications.

Data of field 1 and field 2, which constitute 1 frame, are inputted, and a scene change detecting circuit 65  
5 immediately detects a scene change between intra-frame fields when there is a scene change therebetween.

When the scene change detecting circuit 65 detects the occurrence of a field scene change, a switching signal is generated, a switch SW is switched to the terminal 1 side,  
10 and the same data as that of field 1 is outputted for field 2.

In this manner, when a field scene change is detected, a field is repeated in the pertinent frame, and the input frame is remade. By repeating one field, it is possible to  
15 artificially change the location of a scene change between intra-frame fields to an inter-frame scene change in accordance with the solution principle illustrated in Fig. 4.

Fig. 21 is a diagram illustrating an eighth embodiment  
20 of the present invention. This embodiment is a constitution, which applies the embodiment of Fig. 20 to an encoding apparatus. The embodiment of Fig. 20 is used as the pre-processing circuit 68 of Fig. 21.

Fig. 22 is an example of a constitution of the pre-  
25 processing circuit 68 in Fig. 21. This embodiment is constituted such that, when a scene change detecting circuit 65 detects a field scene change, field 1 data is

repeated and outputted for field 2 in accordance with a switch SW. Furthermore, the function of a counter 670 is the same as that described in the embodiment of Fig. 19.

In actual encoding in accordance with this embodiment,  
5 processing is performed at a scene change between intra-frame fields in a B-picture for which encoding efficiency is poor. If a scene change is an inter-frame scene change, predictive encoding can be efficiently performed for a B-picture from preceding and succeeding reference pictures by  
10 simply using an I-picture or intra-picture encoding on a reference picture immediately following, input time-wise, a scene change.

The thinking behind the eighth embodiment is similar to that of the embodiment of Fig. 18 in the sense that a  
15 coded picture is encoded as a different picture from the actual inputted picture, but in the embodiment of Fig. 21, when a scene change occurs between fields, a frame is not replaced with a reference picture, but rather both fields within the frame are made to have the same data by  
20 repeating one field in an inputted original picture as illustrated in Fig. 4.

Fig. 23 is a block diagram of an example of a constitution of a decoding apparatus corresponding to an encoding apparatus based on the solution principles  
25 illustrated in accordance with Fig. 1-Fig. 4 above.

A signal, wherein the output of a decoder 100 is added to a motion compensation signal either directly or via an

adder 101 by switching a switch SW, is outputted as a decoded signal.

To generate a motion compensation signal, this decoding apparatus has a fore-picture memory 102 and an aft-picture memory 103, and also has a forward motion compensating circuit 104, a bi-directional motion compensating circuit 105, and a backward motion compensating circuit 106.

In Fig. 23, the solid line arrows for data read out of memory 102, 103 indicate frame prediction, and the broken line arrows indicate field prediction. And the types thereof can be switched in each macro-block.

Here, the macro-block (MB) data in an MPEG stream outputted from an encoding apparatus comprises MB location, prediction type, which distinguishes between forward, backward and bi-directional prediction, motion vectors, and encoding coefficient data.

In the current MPEG-2 standard, the number of motion vectors at frame structure encoding, as shown in Table 1, is 1 vector for one direction in the case of frame prediction, and 2 vectors for one direction in the case of field prediction.

The data on the stream in this case is as follows.

In the case of frame prediction of one (forward or backward) direction prediction:

prediction type + motion vector 1

In the case of field prediction of one (forward or

backward) direction prediction:

prediction type + motion vector 1 + motion vector 2

The above-mentioned motion vector 1 is a top#field  
(odd field) vector, and motion vector 2 is a bottom#field  
5 (even field) vector.

In the case of frame prediction of bi-directional  
prediction:

prediction type + motion vector 1 + motion vector 2

Motion vector 1 is a forward#frame vector, and motion  
10 vector 2 is a backward#frame vector.

Furthermore, in the case of field prediction of bi-  
directional prediction:

prediction type + motion vector 1 + motion vector 2 +  
motion vector 3 + motion vector 4

15 Motion vector 1 is a forward#top#field vector, motion  
vector 2 is a forward#bottom#field vector, motion vector 3  
is a backward#top#field vector, and motion vector 4 is a  
backward#bottom#field vector.

For bi-directional field prediction according to the  
20 present invention, motion vectors are one direction 1  
vector, and constitute

prediction type + motion vector 1 + motion vector 2

Motion vector 1 is a forward#field vector, and motion  
vector 2 is a backward#field vector.

25 This can be taken in 2 ways, that is, motion vector 1  
is a forward#top#field vector, and motion vector 2 is a  
backward#bottom#field vector, or motion vector 1 is a

forward#bottom#field vector, and motion vector 2 is a backward#top#field vector, and which way is taken is determined by a top#field#first#flag.

Fig. 24 is a diagram illustrating the same concept as that of Fig. 11. Fig. 24 is a diagram showing the modes of motion vector 1, and motion vector 2, which are determined by the top#field#first#flag. That is, when top#field#first#flag = 1, as shown in Fig. 24A, motion vector 1 is a forward#top#field vector, and motion vector 2 is a backward#bottom#field vector.

Conversely, when top#field#first#flag = 0, as shown in Fig. 24B, motion vector 1 is a forward#bottom#field vector, and motion vector 2 is a backward#top#field vector.

Fig. 25 is a block diagram of an example of a constitution of the bi-directional motion compensating circuit 105 of Fig. 23.

In the case of frame prediction, a macro-block of a frame constitution of a location equivalent to each motion vector is read out from fore-picture memory 102, and aft-picture memory 103, and  $\frac{1}{2}$  the sum of the addition thereof is calculated, and outputted in accordance with an adding circuit 251, and a  $\frac{1}{2}$  circuit 252.

In the case of field prediction, 4  $\frac{1}{2}$  macro-blocks, which are equivalent to the locations of 4 motion vectors, are read out from memory 102, 103. These are a fore-picture odd field  $\frac{1}{2}$  macro-block, a fore-picture even field  $\frac{1}{2}$  macro-block, an aft-picture odd field  $\frac{1}{2}$  macro-block, and

an aft-picture even field  $\frac{1}{2}$  macro-block.

Next, the odd field  $\frac{1}{2}$  macro-block of the fore-picture,  
and the odd field  $\frac{1}{2}$  macro-block of the aft-picture are  
inputted, and  $\frac{1}{2}$  the sum of the addition thereof is  
5 calculated, and outputted in accordance with an adding  
circuit 253, and a  $\frac{1}{2}$  circuit 254.

Further, the fore-picture even field  $\frac{1}{2}$  macro-block,  
and the aft-picture even field  $\frac{1}{2}$  macro-block are inputted,  
and  $\frac{1}{2}$  [the sum] of the addition thereof is calculated, and  
10 outputted in accordance with an adding circuit 255, and a  $\frac{1}{2}$   
circuit 256.

Furthermore, in the case of field prediction according  
to the present invention, a determination is made on the  
basis of the above-mentioned top#field#first#flag whether a  
15 combination of a fore-picture odd field  $\frac{1}{2}$  macro-block and  
an aft-picture even field  $\frac{1}{2}$  macro-block, or a combination  
of a fore-picture even field  $\frac{1}{2}$  macro-block and an aft-  
picture odd field  $\frac{1}{2}$  macro-block, which is equivalent to 2  
motion vectors, is read out from memory 102, 103. The  
20 decided combination is outputted as a macro-block from a  
selection circuit 257.

As described above, according to the present  
invention, even when scene change detection occurs during  
frame structure encoding in a B-picture, and in a place  
25 that is not a break in a frame picture, efficient encoding  
can be performed without a deterioration of prediction  
efficiency.

In each of the above embodiments, operation was described using the constitution of the hardware block, but the present invention is not limited to hardware, and a corresponding function can also be achieved using software.

5           Furthermore, examples of each of the above embodiments were provided for an understanding of the present invention, but the scope of the protection of the present invention is not limited thereto. So long as same does not depart from the idea of the present invention, a moving  
10       pictures encoding method and apparatus that is equivalent to a constitution in the claims is also included in the scope of protection of the present invention.

What Is Claimed Is:

1. A moving pictures encoding method, by which a frame of input signals of an interlaced image is treated as a picture, and prediction and encoding are performed for the picture in macro-block units from both a forward picture, which is temporally in the past, and a backward picture, which is in the future, the moving pictures encoding method comprising the steps of:

performing motion prediction between fields, which treat as a unit a field, which divides each picture in macro-block units into either odd numbers or even numbers of pixel scanning lines of the frame when encoding is performed in accordance with a prediction from both the forward picture and the backward picture;

selectively switching in picture units, as a prediction mode, between the use of prediction from a forward field motion vector for one field, and the use of prediction from a backward field motion vector for the other field;

generating a predictive picture corresponding to the selected prediction mode; and

encoding the input signals using the generated predictive picture.

2. A moving pictures encoding method, by which a frame of input signals of an interlaced image is treated as a picture, and prediction and encoding are performed for

the picture in macro-block units from both a forward picture, which is temporally in the past, and a backward picture, which is in the future, the moving pictures encoding method comprising the steps of:

5 performing motion prediction between fields, which treat as a unit a field, which divides each picture in macro-block units into either odd numbers or even numbers of pixel scanning lines of the frame when encoding is performed in accordance with a prediction from both the forward picture and the backward picture;

10 constantly using, as a prediction mode, prediction from a forward field motion vector for one field, and prediction from a backward field motion vector for the other field;

15 generating a predictive picture corresponding to this prediction mode; and

encoding the input signals using the generated predictive picture.

20 3. The moving pictures encoding method according to claim 1, further comprising the steps of:

detecting a scene change of said input signal picture in a field unit, which is divided into either odd numbers or even numbers of pixel scanning lines of said frame; and

25 selecting a prediction from a forward field motion vector for one field, and a backward field motion

vector for the other field, relative to a picture, in which a scene change exists between the fields of the frame in the input signal picture.

5           4.   A moving pictures encoding method, which performs encoding by treating an interlaced image as an input signal, and treating a macro-block as a unit, the moving pictures encoding method comprising the steps of:

              detecting a scene change of the input signal picture in a field unit, which is divided into either odd numbers or even numbers of pixel scanning lines of a frame;

              performing prediction from either each or both of a forward picture, which is temporally in the past, and a backward picture, which is in the future; and

10           encoding this input signal picture as field structure encoding for a picture, for which inter-picture prediction is performed from a picture of at the least both this forward picture and this backward picture, and for a picture, in which a scene change exists between intra-frame fields in this input signal picture.

              5.   A moving pictures encoding method, which performs encoding by treating a frame of input signals of an interlaced image as a picture, and treating a macro-block as a unit, the moving pictures encoding method comprising the steps of:

              detecting a scene change of this input signal

picture in a field unit, which is divided into either odd numbers or even numbers of pixel scanning lines of a frame; and

performing encoding for a picture, for which  
5 inter-picture prediction is performed from a picture of at the least both of a forward picture, which is temporally in the past, and a backward picture, which is in the future, and for a picture, in which a scene change exists between intra-frame fields in this input signal picture, treating  
10 either this forward picture, or this backward picture as the same data.

6. The moving pictures encoding method according to claim 5, wherein the encoding includes the steps of fixing  
15 the encoding prediction direction to one direction frame prediction; making the motion vector always equal 0, and also making the encoding difference data always equal 0; and treating the picture as the same data as either a forward reference picture or a backward reference picture.

20

7. The moving pictures encoding method according to claim 5, wherein the encoding includes the steps of treating said picture as the same data as either a forward reference picture or a backward reference picture; and  
25 setting sets either a forward reference picture or a backward reference picture as the current frame picture when setting the coded original picture.

8. An interlaced picture signal inputting method,  
which inputs an interlaced picture as input signals, the  
interlaced picture signal inputting method comprising the  
5 steps of:

detecting a scene change of this input signal  
picture in a field unit, which is divided into either odd  
numbers or even numbers of pixel scanning lines of a frame  
of this picture; and

10 repeatedly outputting one field relative to a  
picture in which a scene change exists between intra-frame  
fields in this input signal picture.

9. A moving pictures encoding method, which performs  
15 encoding by treating a frame of input signals of an  
interlaced image as a picture, and treating a macro-block  
as a unit, the moving pictures encoding method comprising  
the steps of:

detecting a scene change of this input signal  
20 picture in a field unit, which is divided into either odd  
numbers or even numbers of pixel scanning lines of a frame;  
and

repeatedly outputting one field of this picture  
when there is a picture for which prediction is performed  
25 from a picture of both of a forward picture and a backward  
picture, and a scene change exists between intra-frame  
fields in this input signal.

10. A moving pictures decoding method comprising the steps of decoding a moving pictures encoded signal corresponding to encoding that applies motion compensation corresponding to prediction from a forward field motion vector for one field, and a backward field motion vector for the other field.

11. A moving pictures encoding apparatus, in which a frame of input signals of an interlaced image is treated as a picture, and which performs prediction and encoding for the picture in macro-block units from either each of a forward picture, which is temporally in the past, and a backward picture, which is in the future, or from a bi-directional picture, the moving pictures encoding apparatus comprising:

field motion vector detecting means for performing motion prediction between fields, which treat as a unit a field, which divides each picture in macro-block units into either odd numbers or even numbers of pixel scanning lines of the frame when encoding is performed in accordance with a prediction from the bi-directional picture;

prediction mode selecting means for selectively switching in picture units, as a prediction mode, between the use of prediction from a forward field motion vector for one field, and the use of prediction from a backward

field motion vector for the other field;

motion compensating means for generating a  
predictive picture corresponding to a prediction mode  
selected in accordance with this prediction mode selecting  
5 means; and

encoding means for encoding this input signal  
using a predictive picture generated in accordance with  
this motion compensating means.

10 12. A moving pictures encoding apparatus, in which a  
frame of input signals of an interlaced image is treated as  
a picture, and which performs prediction and encoding for  
the picture in macro-block units from either each of a  
forward picture, which is temporally in the past, and a  
15 backward picture, which is in the future, or from a bi-  
directional picture, the moving pictures encoding apparatus  
comprising:

field motion vector detecting means for  
performing motion prediction between fields, which treat as  
20 a unit a field, which divides each picture in macro-block  
units into either odd numbers or even numbers of pixel  
scanning lines of this frame when encoding is performed in  
accordance with a prediction from this bi-directional  
picture;

25 motion compensating means for constantly using as  
a prediction mode prediction from a forward field motion  
vector for one field, and from a backward field motion

vector for the other field, and for generating a predictive picture corresponding to this prediction mode; and

encoding means for encoding this input signal using a predictive picture generated in accordance with this motion compensating means.

13. The moving pictures encoding apparatus according to claim 11, further comprising:

scene change detecting means for detecting a scene change of said input signal picture in a field unit, which is divided into either odd numbers or even numbers of pixel scanning lines of said frame; and

said prediction mode selecting means enters into a selection item a prediction from a forward field motion vector for one field, and from a backward field motion vector for the other field, relative to a picture, in which a scene change exists between the fields of this frame in this input signal picture.

14. A moving pictures encoding apparatus, which treats an interlaced picture as an input signal, and which treats a macro-block as a unit, the moving pictures encoding apparatus comprising:

scene change detecting means for detecting a scene change of said input signal picture in a field unit, which is divided into either odd numbers or even numbers of pixel scanning lines of a frame;

inter-picture predicting means for performing prediction from a picture of either each or both of a forward picture, which is temporally in the past, and a backward picture, which is in the future;

5 frame encoding means for encoding an input signal picture frame as a picture;

field encoding means for encoding an input signal picture field as a picture; and

10 encoding switching means for switching in frame units encoding in accordance with this frame encoding means and field encoding means,

and performing control so that encoding is performed using this field encoding means in accordance with this encoding switching means for a picture, for which  
15 inter-picture prediction is performed from a picture of at the least both of this forward picture and this backward picture, and for a picture, in which a scene change exists between intra-frame fields in this input signal picture.

20 15. A moving pictures encoding apparatus, which performs encoding by treating an interlaced picture as an input signal, and by treating a macro-block, which is a sub-block thereof, as a unit, the moving pictures encoding apparatus comprising:

25 scene change detecting means for detecting a scene change of an input signal picture in a field unit;

frame encoding means for encoding this input

signal picture frame as a picture;

inter-picture predicting means for performing prediction from a picture of either each or both of a forward picture, which is temporally in the past, and a backward picture, which is in the future; and

controlling means for performing control relative to a picture, for which inter-picture prediction is performed from a picture of at the least both of this forward picture and this backward picture, and for a picture, in which a scene change exists between intra-frame fields in an input picture, so as to encode this picture in accordance with this frame encoding means, having the same data as either a forward reference picture or a backward reference picture.

16. The moving pictures encoding apparatus according to claim 15, wherein:

said controlling means controls said frame encoding means so that a picture is encoded having the same data as either a forward reference picture or a backward reference picture, and has means for fixing an encoding prediction direction to one direction frame prediction; and

there are further comprised means for constantly making a motion vector 0; and

means for also constantly making encoding difference data 0.

17. The moving pictures encoding apparatus according to claim 15, wherein:

said controlling means controls said frame encoding means so that said picture is encoded having the same data as either a forward reference picture or a backward reference picture, and sets either a forward reference picture or a backward reference picture as a current frame picture when setting a coded original picture.

18. A moving pictures input switching apparatus, comprising:

scene change detecting means for detecting in a field unit a scene change of an interlaced picture to be inputted; and

means for repeating one field relative to a picture in which a scene change exists between intra-frame fields in this interlaced picture to be inputted.

19. A moving pictures encoding apparatus, which performs encoding by treating an interlaced picture as an input signal, and by treating a macro-block as a unit, the moving pictures encoding apparatus comprising:

scene change detecting means for detecting a scene change of this input signal picture in a field unit;

frame encoding means for encoding this input signal picture frame as a picture; and

inter-picture predicting means for performing prediction from a picture of either each or both of a forward picture, which is temporally in the past, and a backward picture, which is in the future,

5           and the frame encoding means performs encoding by repeating one field relative to a picture, for which inter-picture prediction is performed from a picture of both of a forward picture and a backward picture, and for a picture, in which a scene change exists between intra-frame fields  
10       in an input picture.

20. A moving pictures decoding apparatus, which corresponds to any of the moving pictures encoding apparatus according to claims 11 through 13, and which has  
15       motion compensating means corresponding to prediction from a forward field motion vector for one field, and from a backward field motion vector for the other field.

## ABSTRACT OF THE DISCLOSURE

An encoding method, which achieves encoding efficiency, and good picture quality encoding even when there exists a picture in which a scene change occurs within an interlaced frame, is provided. A moving pictures encoding method treats a frame of interlaced image input signals as a picture, and performs prediction and encoding for this picture in macro-block units from a picture of both a forward picture, which is temporally in the past, and a backward picture, which is in the future. When performing encoding in accordance with the above-mentioned bi-directional picture, the method performs inter-field motion prediction, which treats as a unit a field, which divides each picture in macro-blocks into either odd numbers or even numbers of pixel scanning lines of this frame, and as a prediction mode, selectively switches in picture units between using prediction from a forward field motion vector for one field, and using prediction from a backward field motion vector for the other field, generates a predictive picture corresponding to the selected prediction mode, and encodes the input signal using the generated predictive picture.

FIG. 1

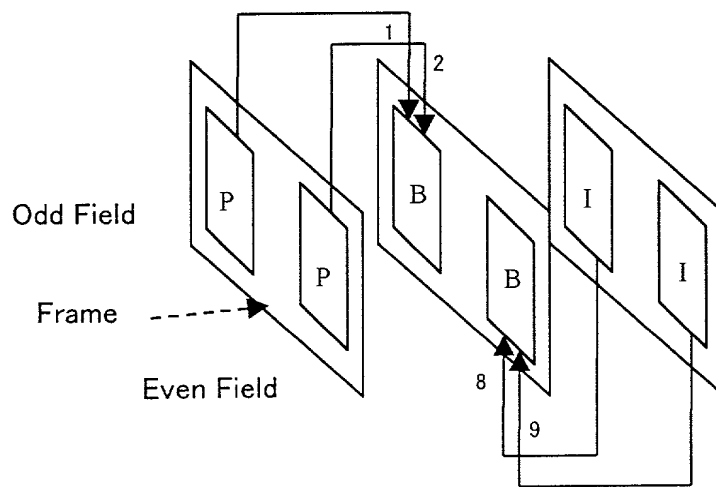


FIG. 2

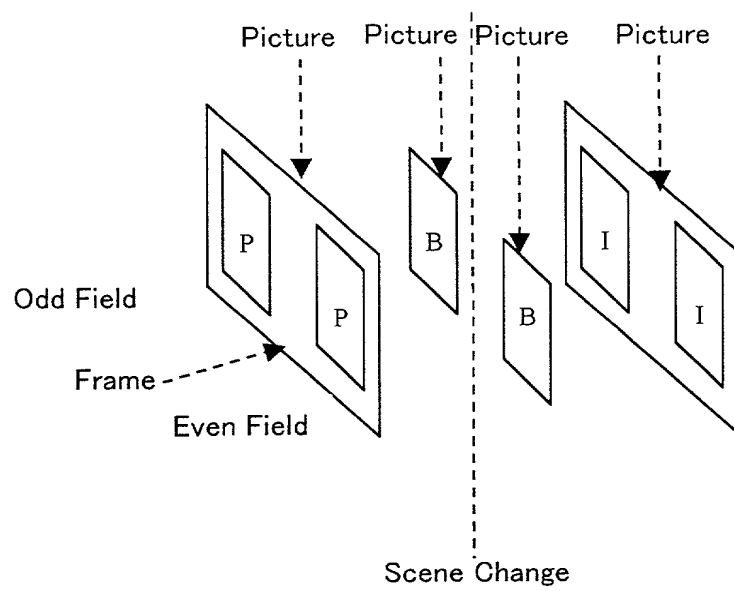


FIG. 3

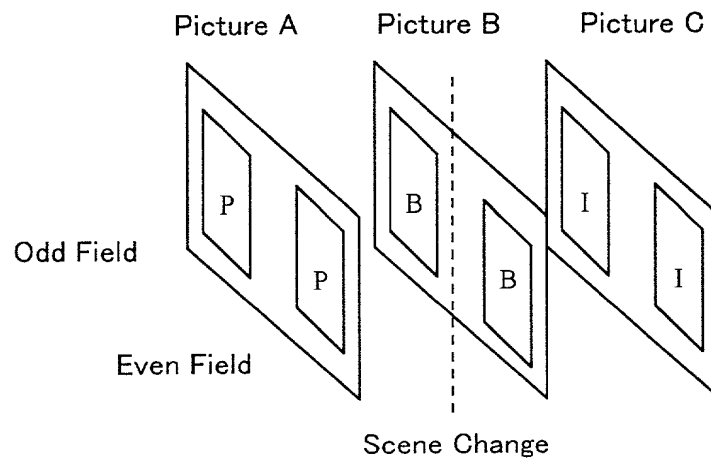


FIG. 4

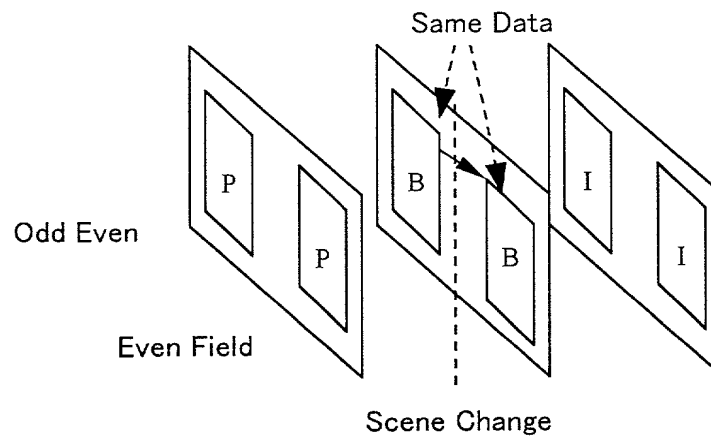


FIG. 5

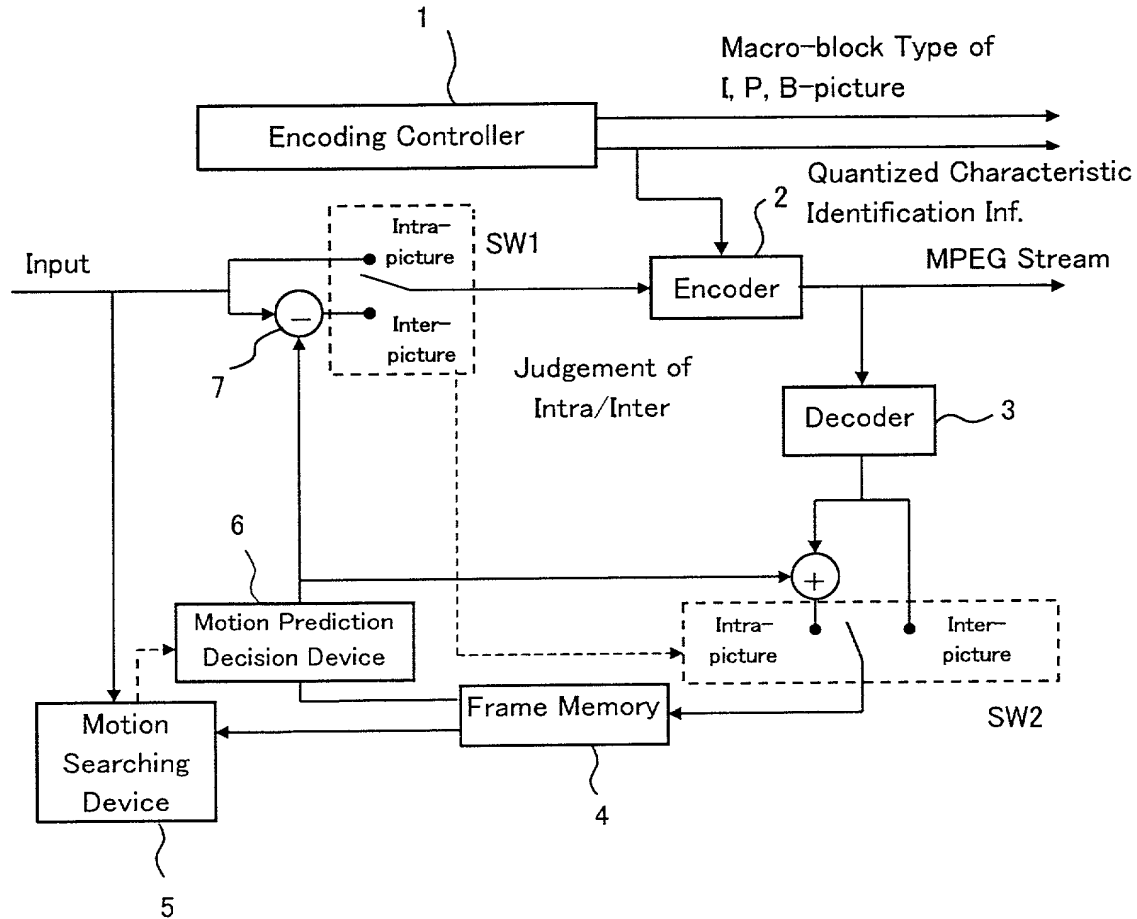


FIG. 6

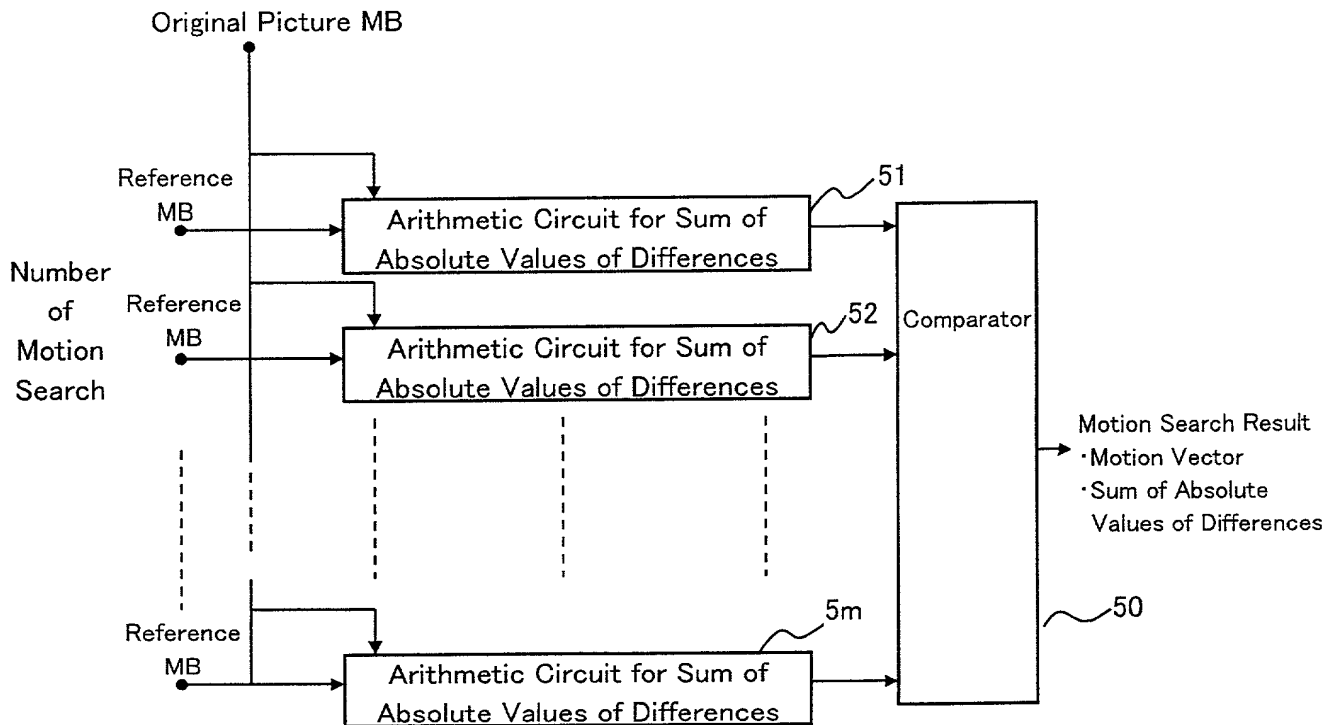


FIG. 7

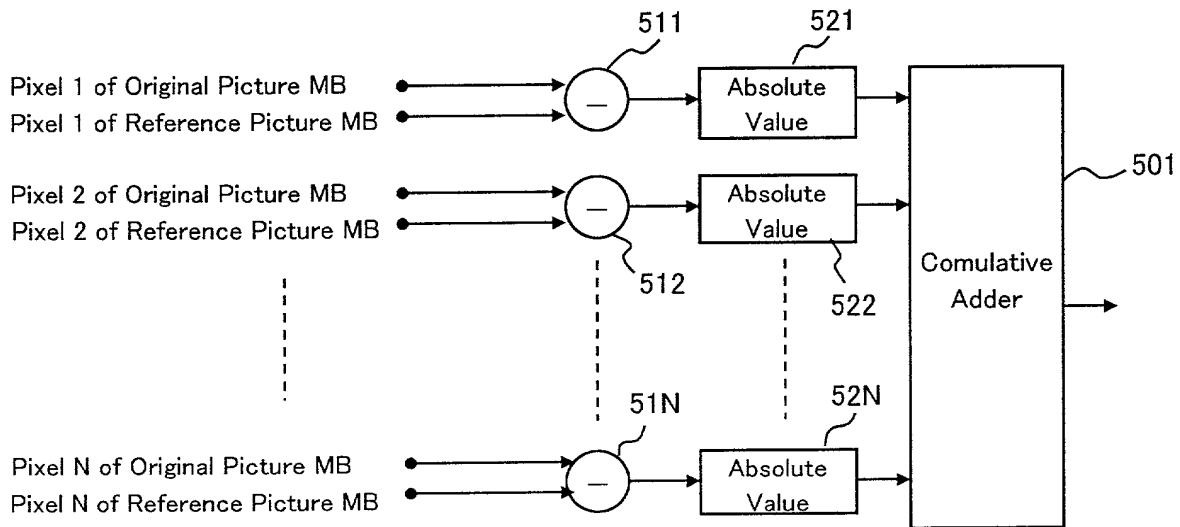


FIG. 8

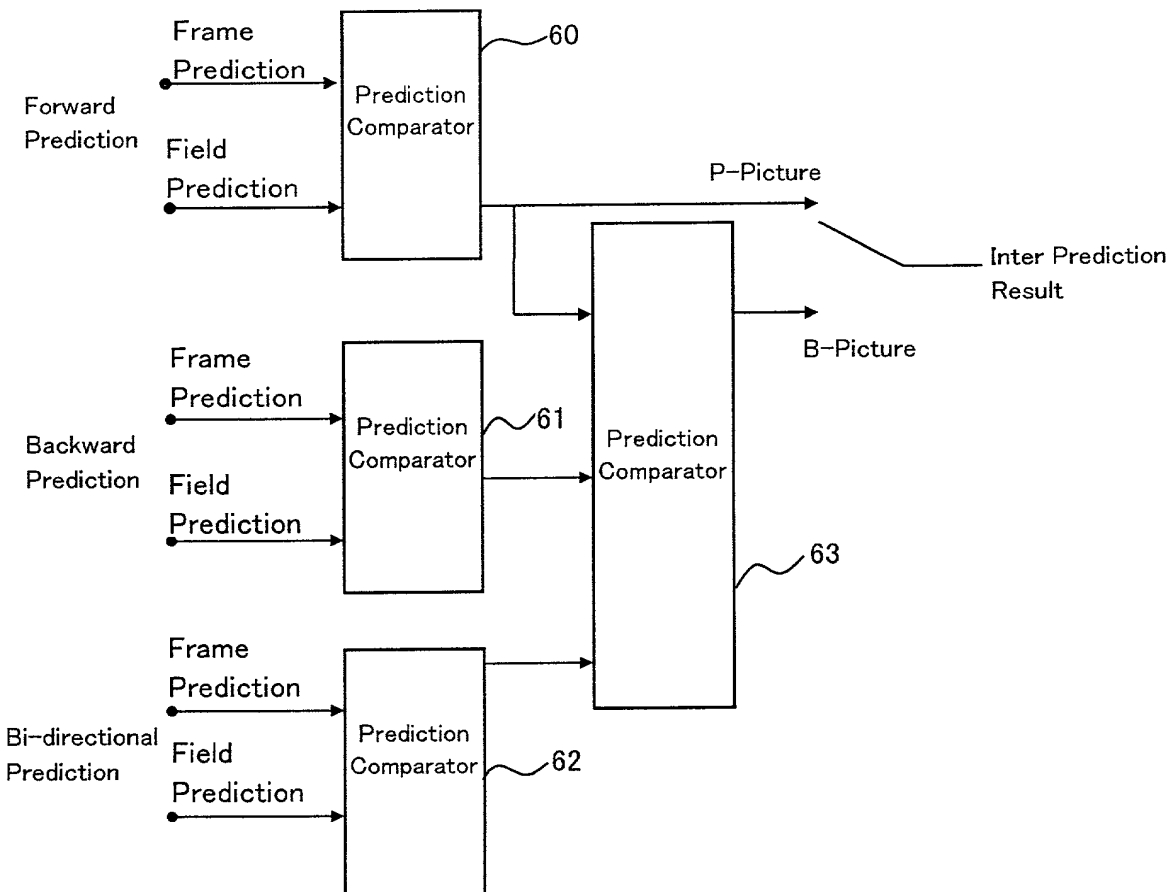


FIG. 9

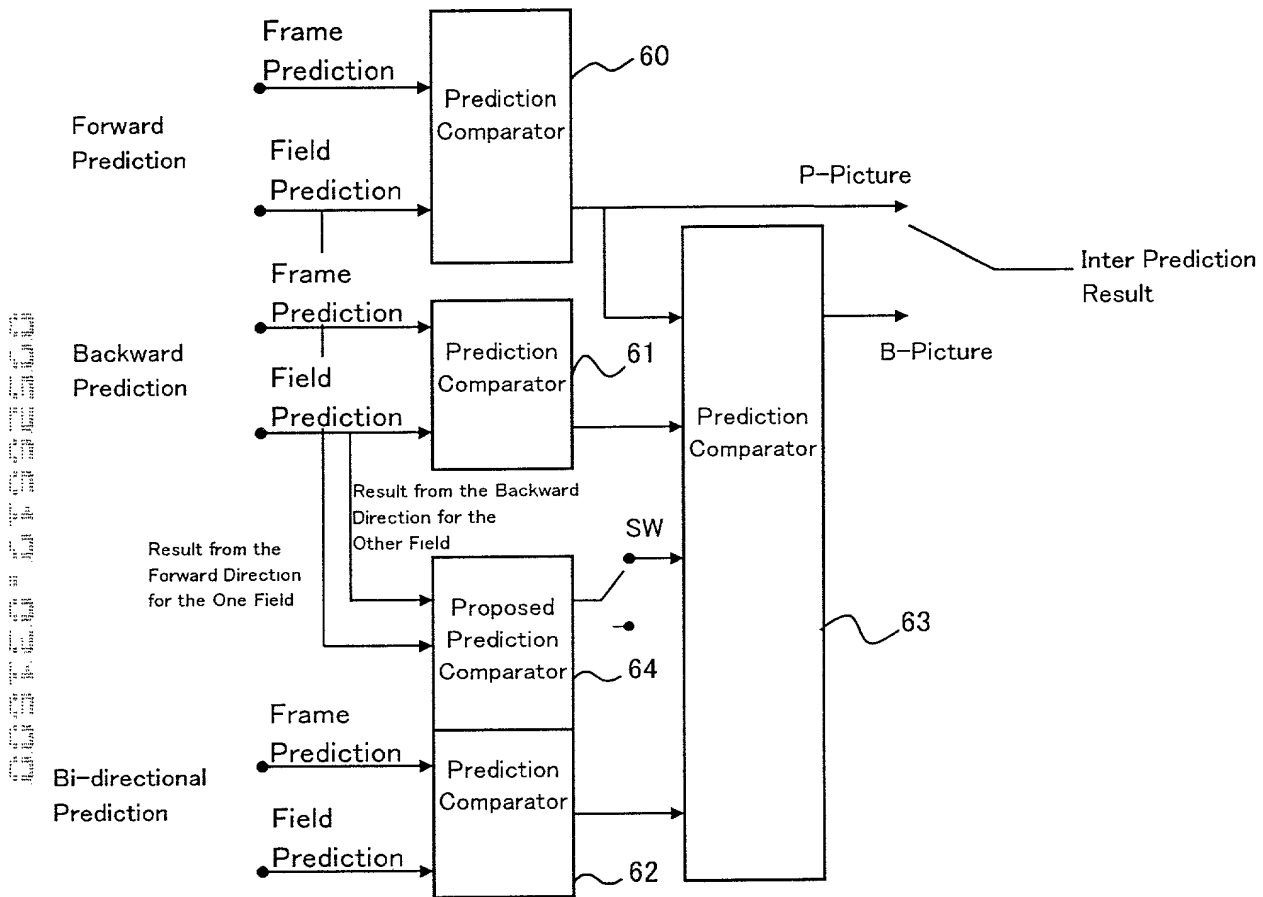


FIG. 10

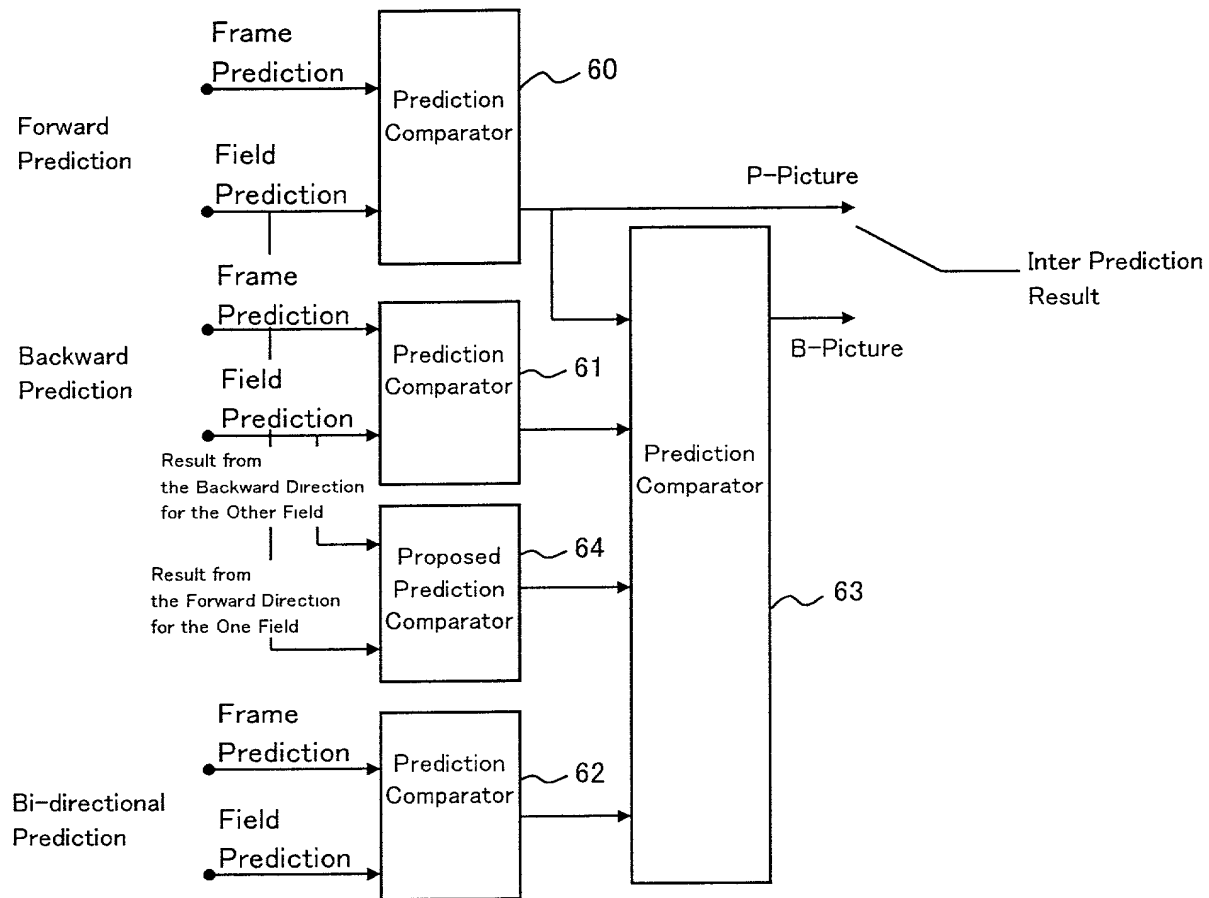


FIG. 11A

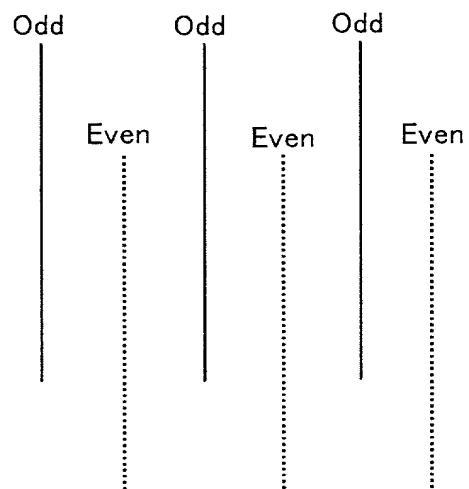


FIG. 11B

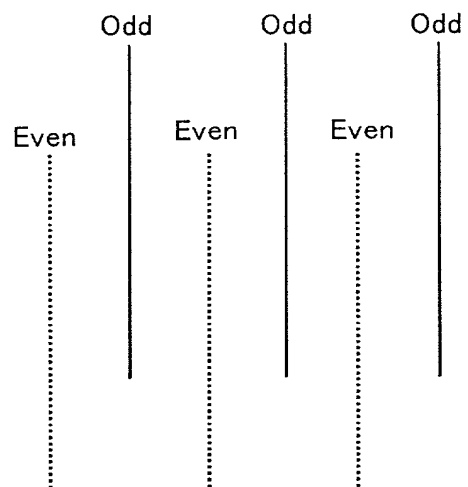


FIG. 12

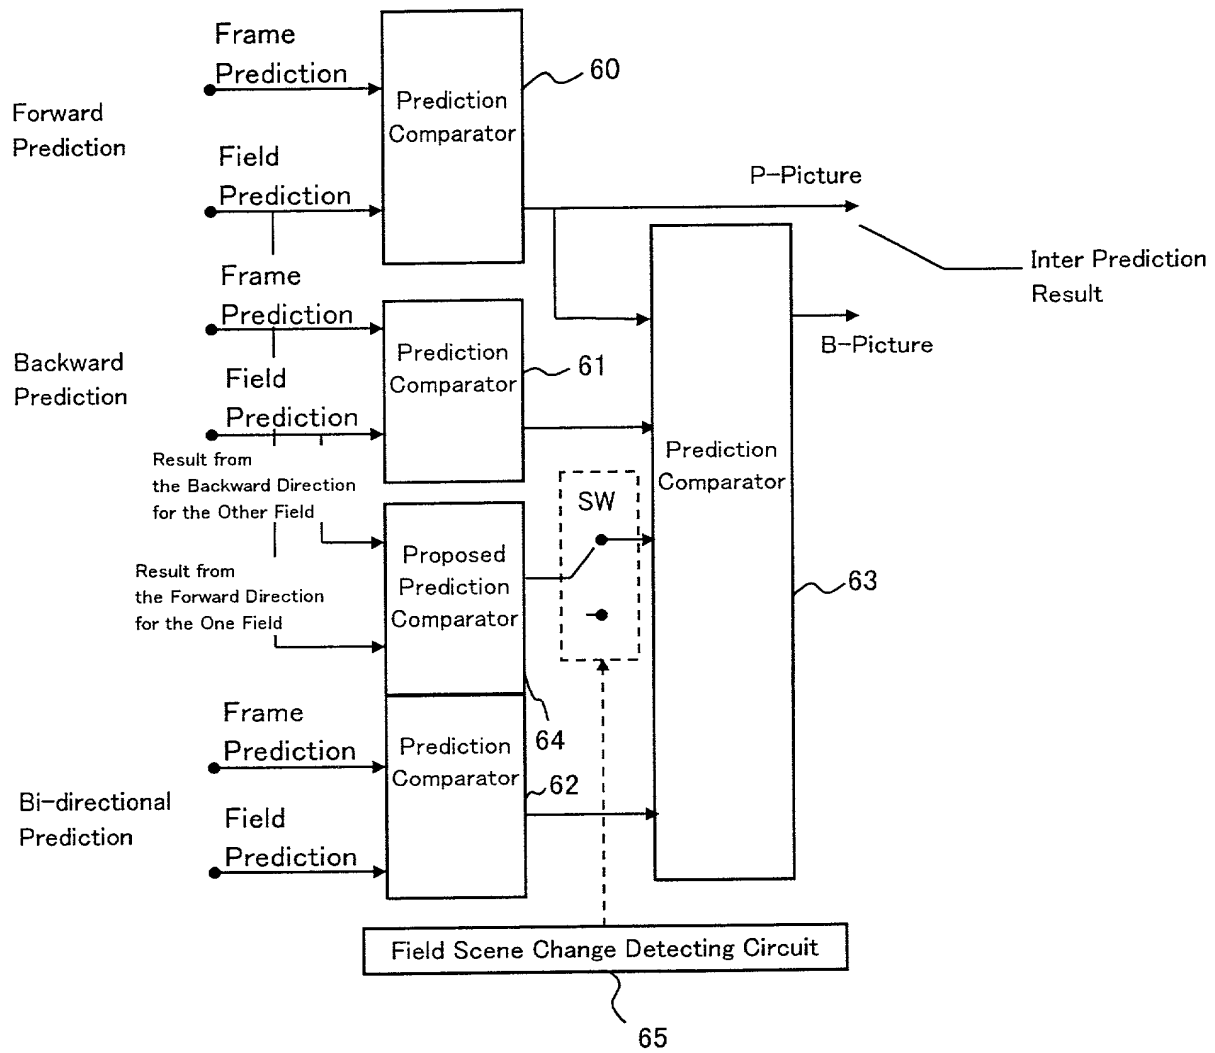


FIG. 13

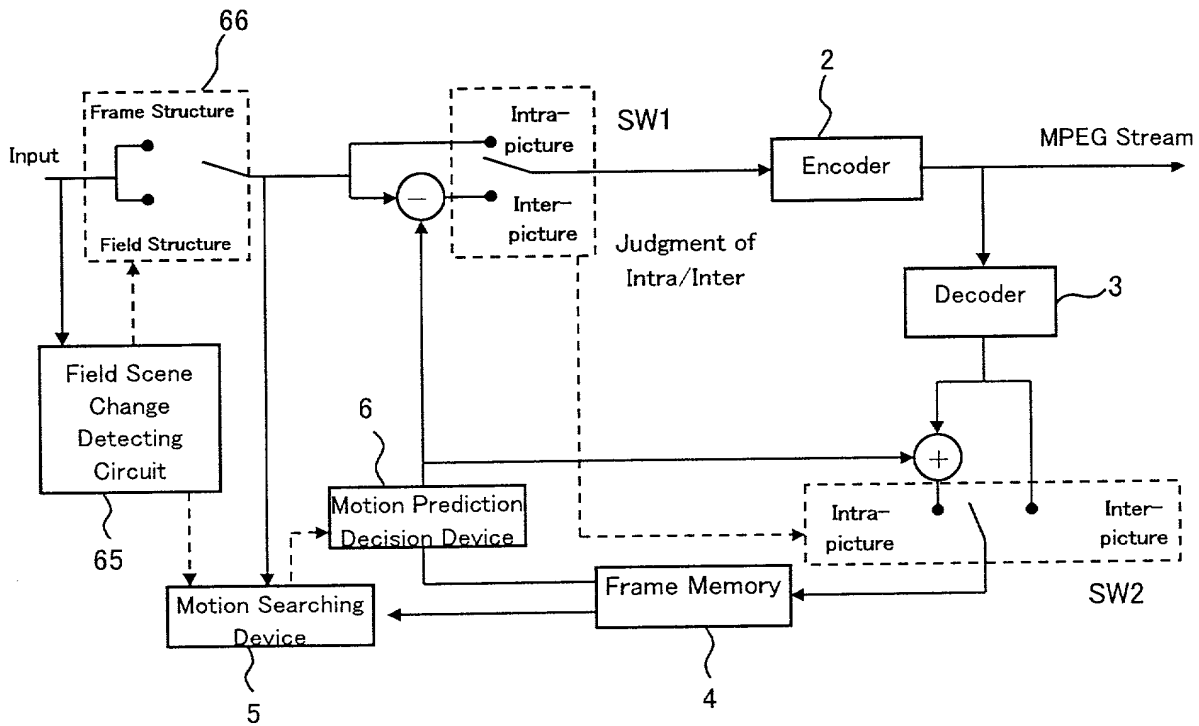


FIG. 14

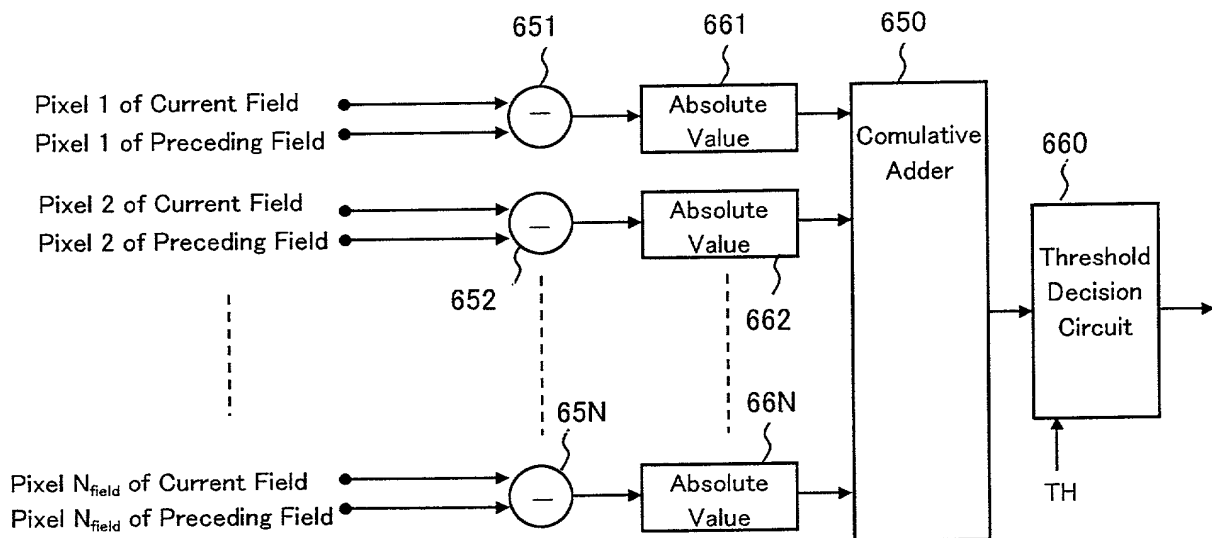


FIG. 15

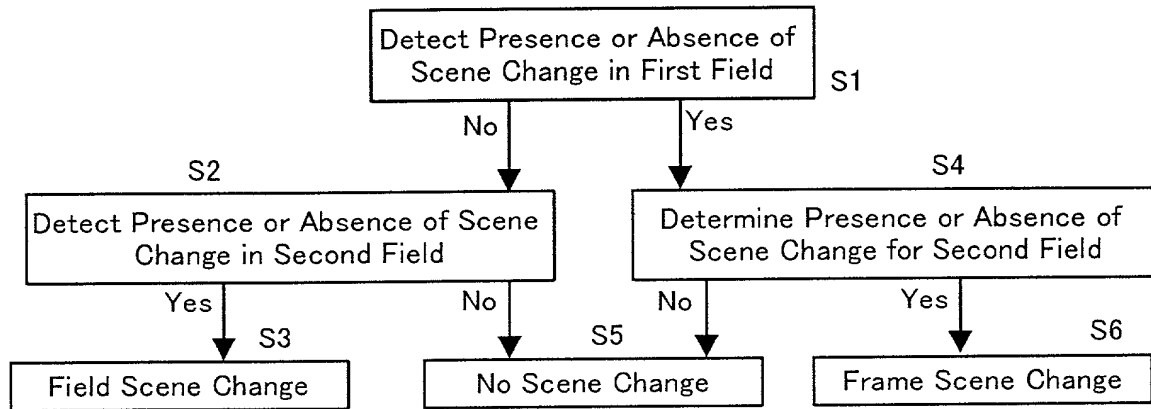


FIG. 16

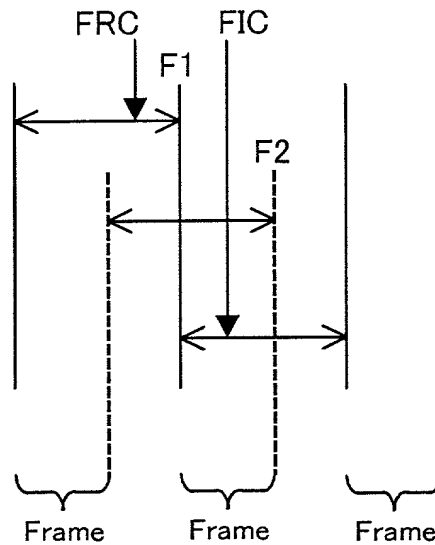


FIG. 17

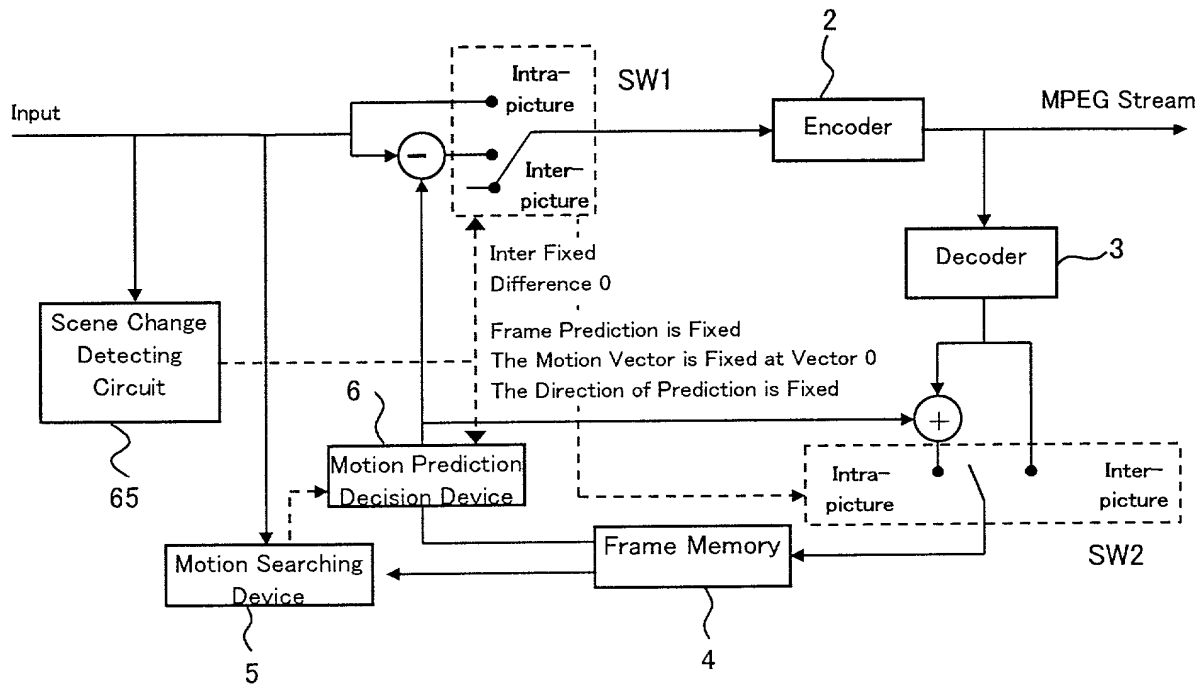


FIG. 18

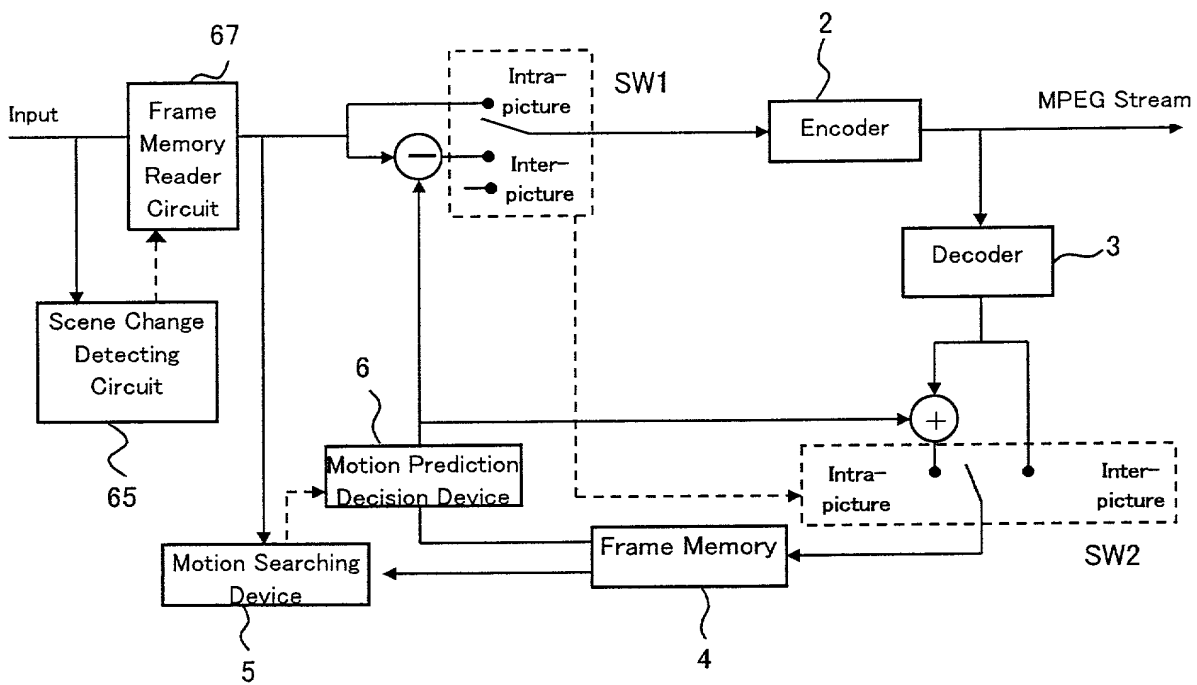


FIG. 19

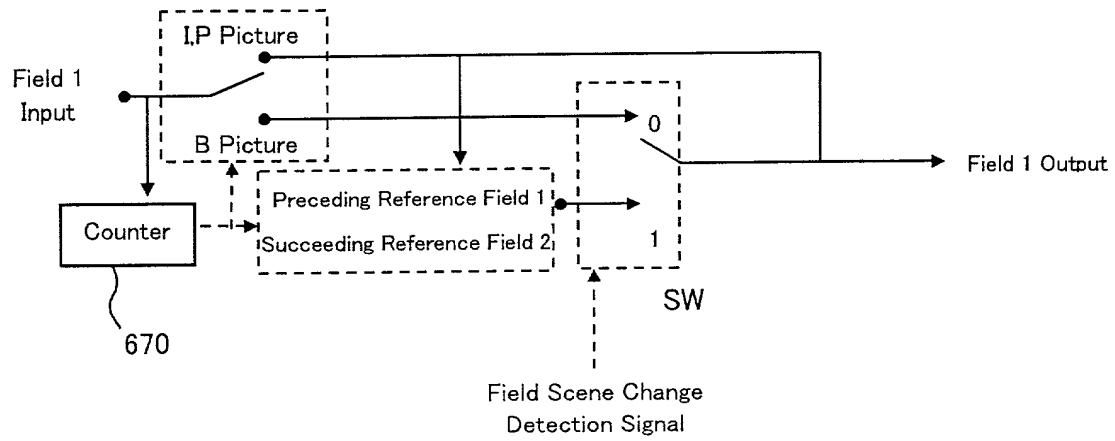


FIG. 20

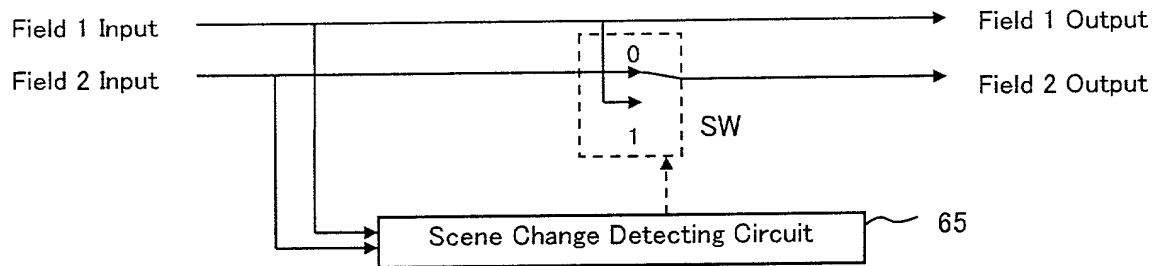


FIG. 21

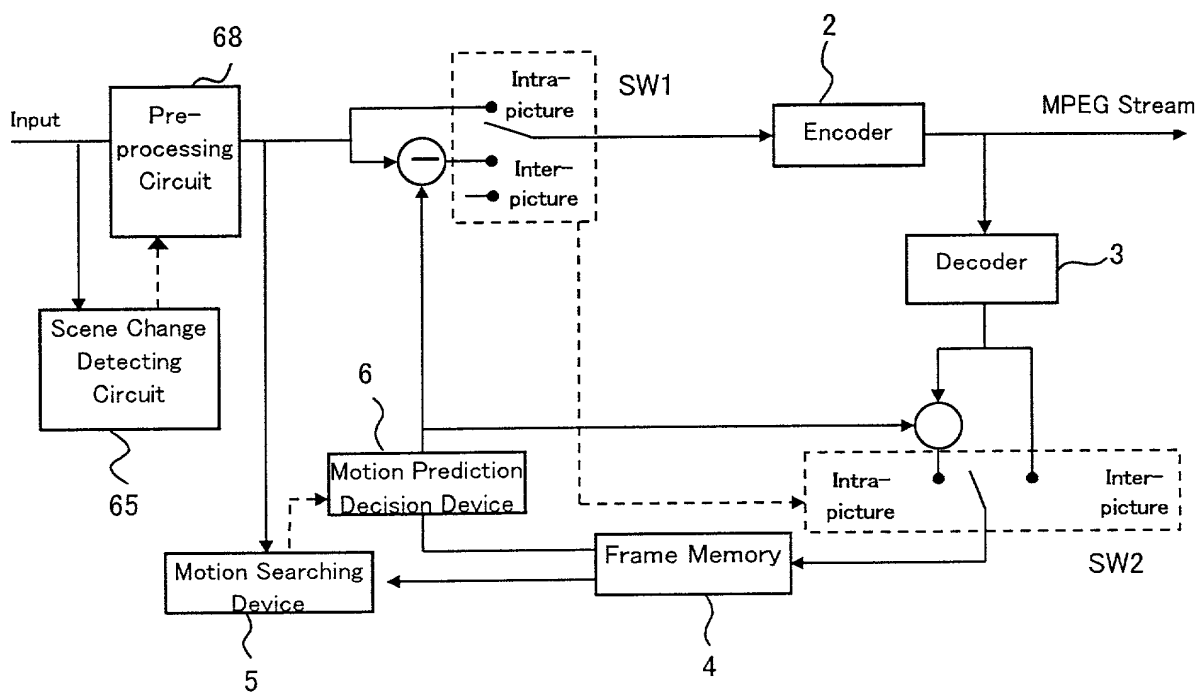


FIG. 22

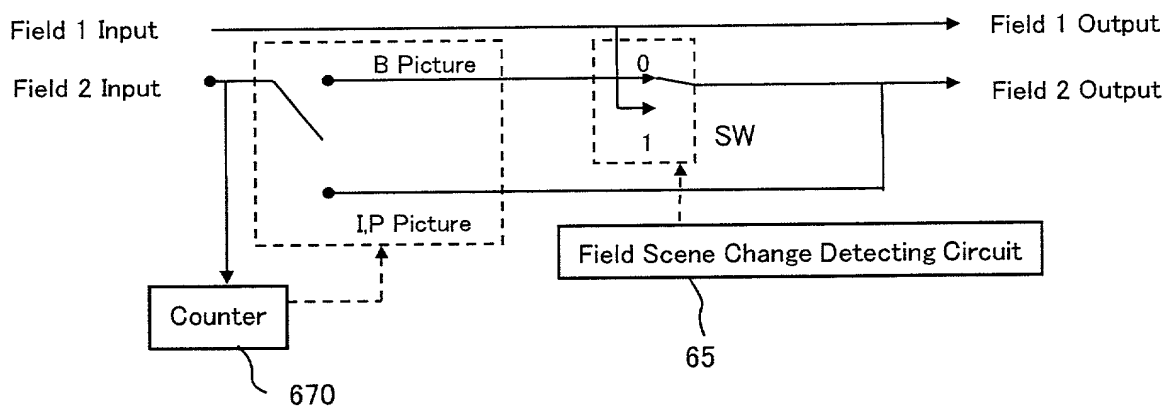


FIG. 23

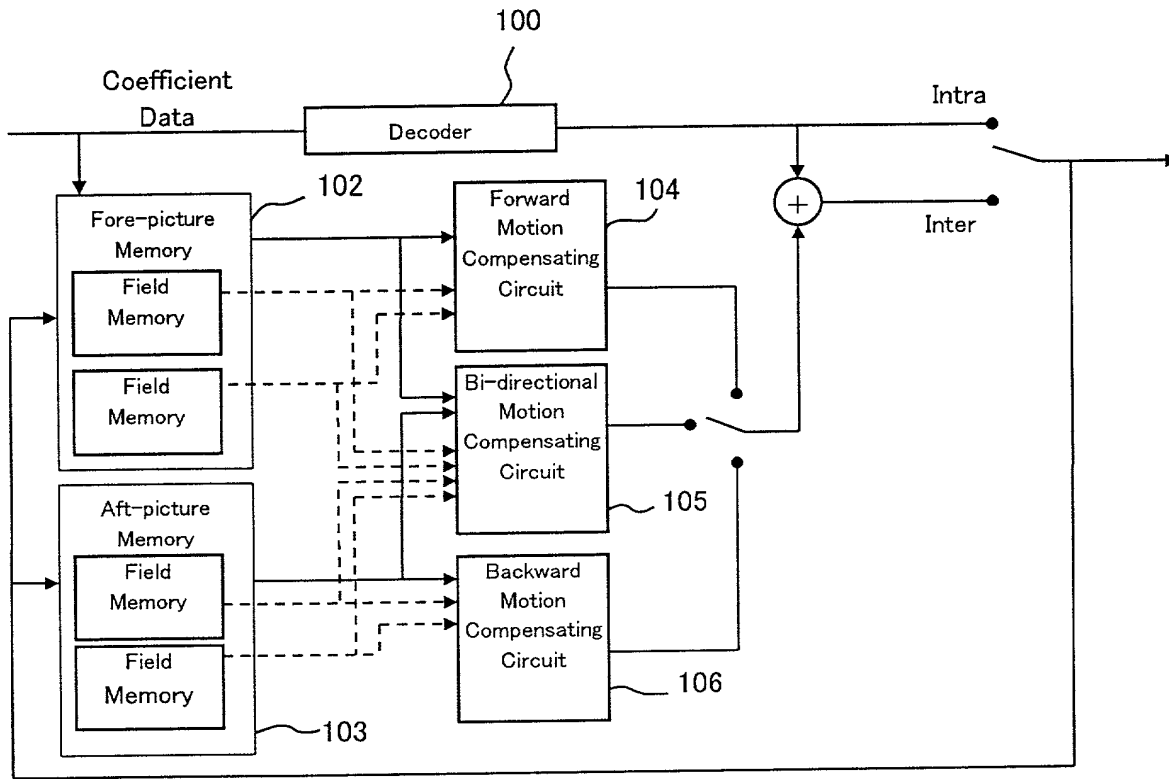


FIG. 24

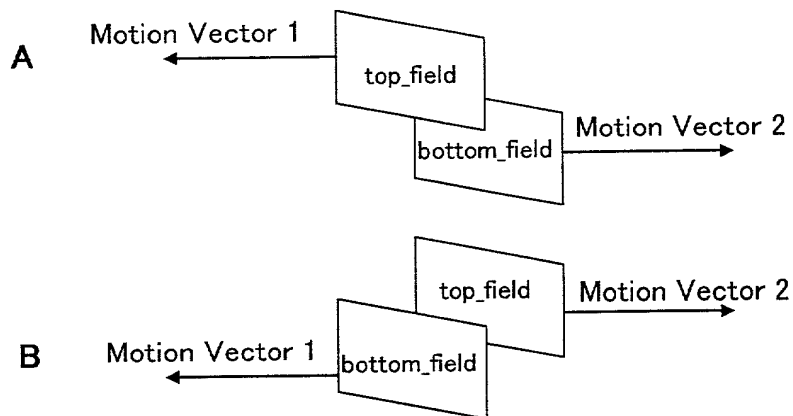


FIG. 25

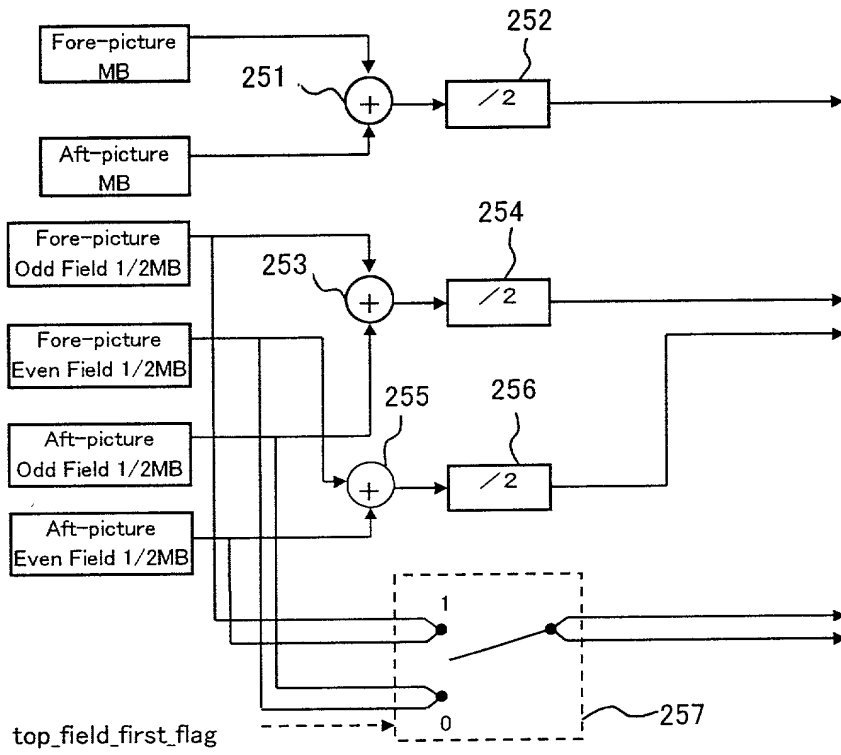


FIG. 26

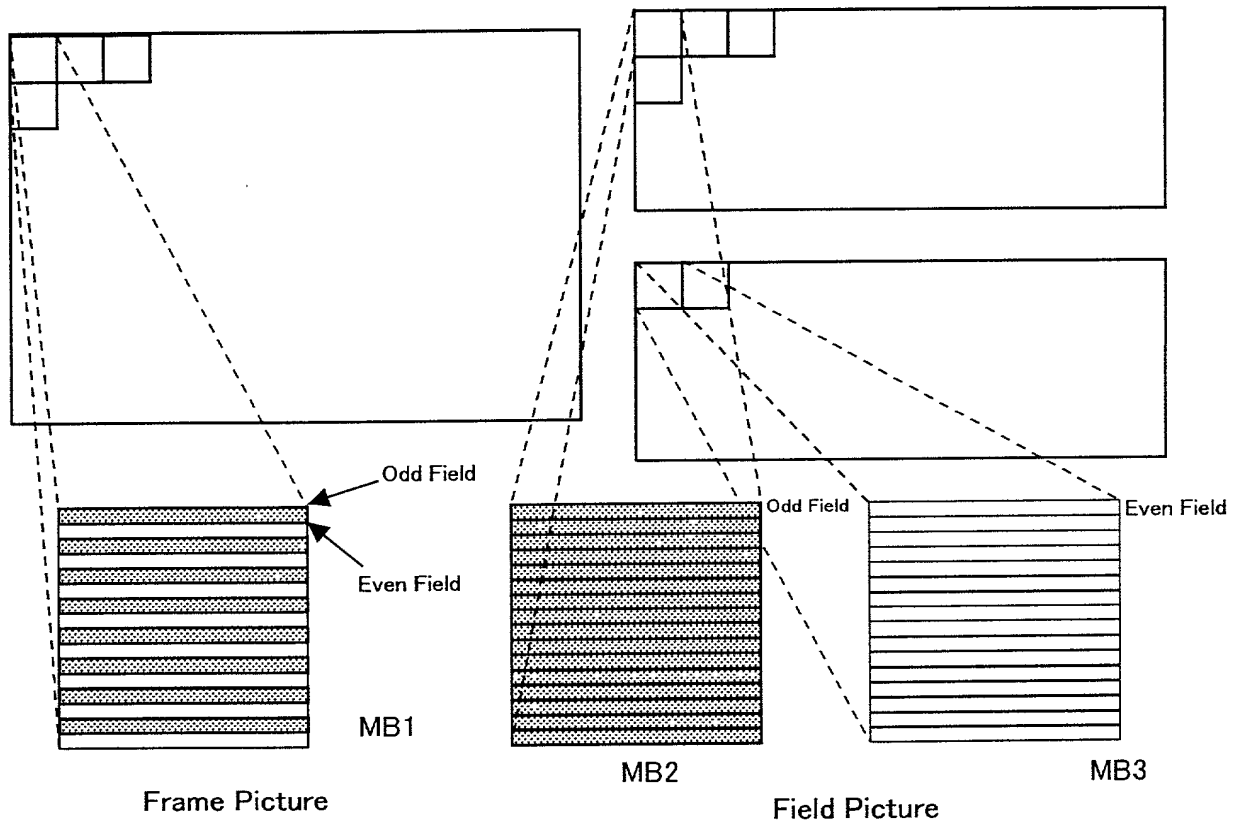


FIG. 27

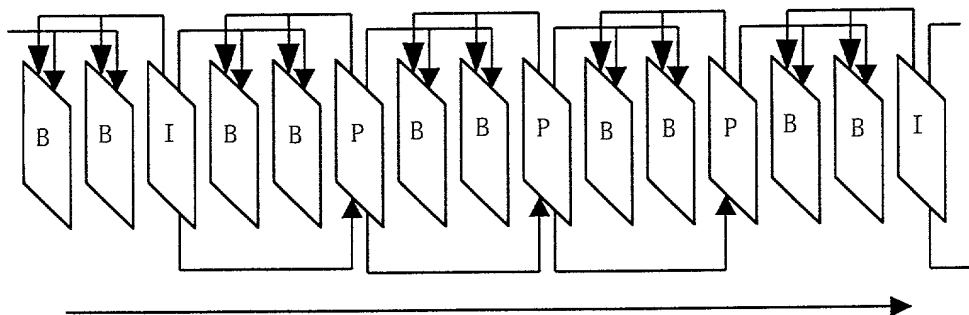


FIG. 28

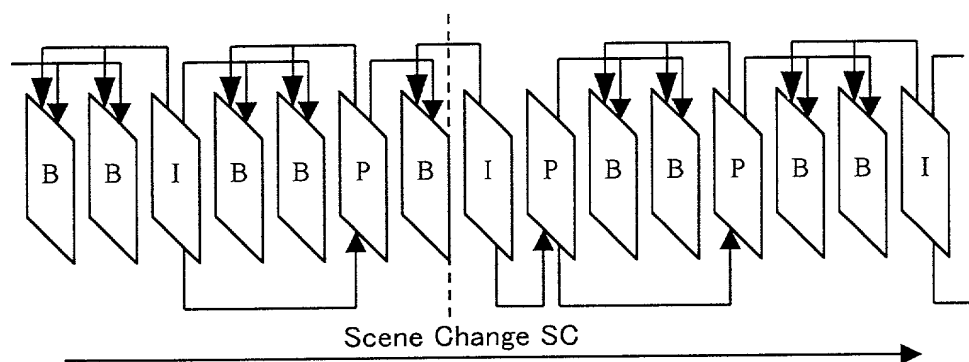


FIG. 29

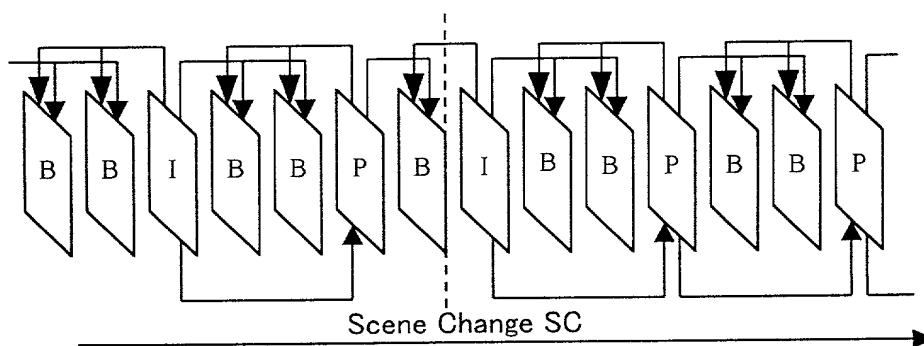


FIG. 30


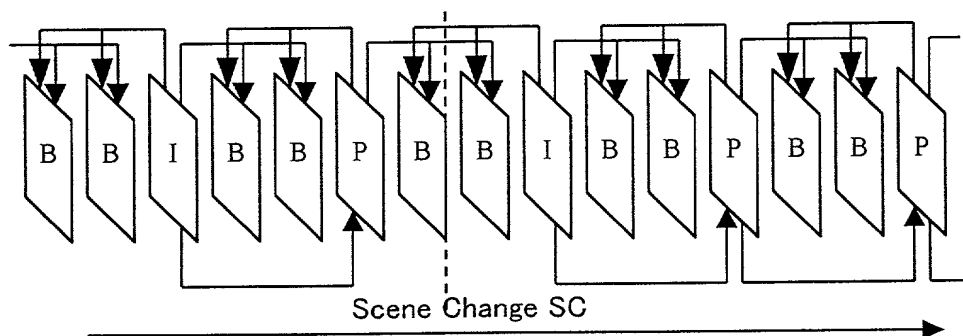


FIG. 31

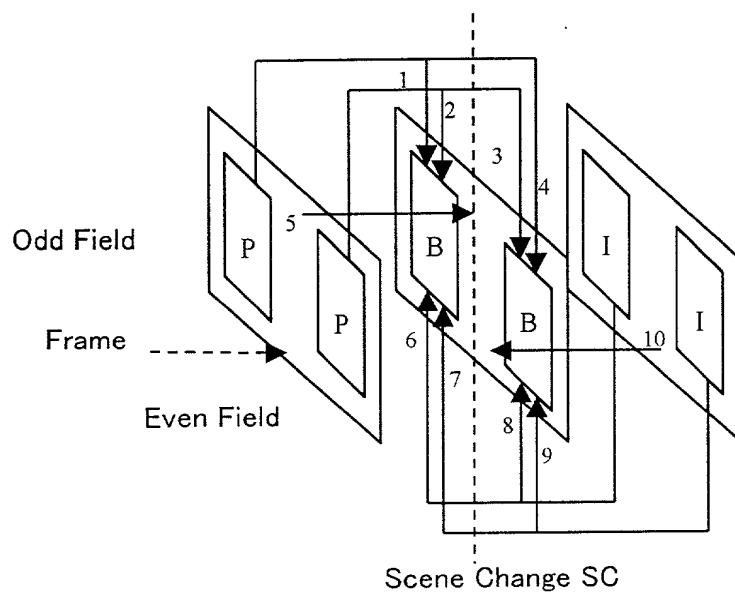

## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

MOVING PICTURES ENCODING METHOD

AND APPARATUS

上記発明の明細書（下記の欄でx印がついていない場合は、本表に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
（該当する場合） \_\_\_\_\_ に訂正されました。

☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

### Prior Foreign Application(s)

外国での先行出願

11-74497

(Number)  
(番号)

Japan

(Country)  
(国名)

(Number)  
(番号)

(Country)  
(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

18/03/1999

(Day/Month/Year Filed)  
(出願年月日)

(Day/Month/Year Filed)  
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**Japanese Language Declaration**  
(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

書類送付先

Aaron B. KARAS, Reg. No. 18,923; Samson HELFGOTT, Reg. No. 23,072 and Leonard COOPER Reg. No. 27,625  
Send Correspondence to:

HELFGOTT & KARAS, P.C.  
Empire State Building, 60th Floor  
New York, New York 10118  
United States of America

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Helgott & Karas, P.C.  
(212) 643-5000

唯一または第一発明者名	Full name of sole or first inventor
発明者の署名	Inventor's signature
日付	Date
住所	Residence
国籍	Citizenship
私書箱	Post Office Address
第二共同発明者	Full name of second joint inventor, if any
第二共同発明者	Second inventor's signature
日付	Date
住所	Residence
国籍	Citizenship
私書箱	Post Office Address

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

第三共同発明者	Full name of third joint inventor, if any Kiyoshi SAKAI		
第三共同発明者	日付	Third inventor's signature <i>Kiyoshi Sakai</i>	Date 13/12/1999
住 所	Residence Nakahara-ku, Kawasaki-shi, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan		
第四共同発明者	Full name of fourth joint inventor, if any Kouji YAMADA		
第四共同発明者	日付	Fourth inventor's signature <i>Kouji Yamada</i>	Date 13/12/1999
住 所	Residence Nakahara-ku, Kawasaki-shi, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan		

第五共同発明者	Full name of fifth joint inventor, if any		
第五共同発明者	日付	Fifth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		

第六共同発明者	Full name of sixth joint inventor, if any		
第六共同発明者	日付	Sixth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		

(第七以降の共同発明者についても同様に  
記載し、署名をすること)

(Supply similar information and signature for  
seventh and subsequent joint inventors.)

THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of: Akihiro YAMORI et al.

Filed: : Concurrently herewith

For : MOVING PICTURES ENCODING METHOD AND APPARATUS

Serial No.: Concurrently herewith

March 16, 2000


Assistant Commissioner of Patents  
Washington, D.C. 20231

SUB-POWER OF ATTORNEY

S I R:

I, Samson Helfgott, Reg. No. 23,072 attorney of record  
herein, do hereby grant a sub-power of attorney to Linda S.  
Chan, Reg. No. 42,400, Jacqueline M. Steady, Reg. No., 44,354  
and Harris A. Wolin, Reg. No. 39,432 to act and sign in my behalf  
in the above-referenced application.

Respectfully submitted,

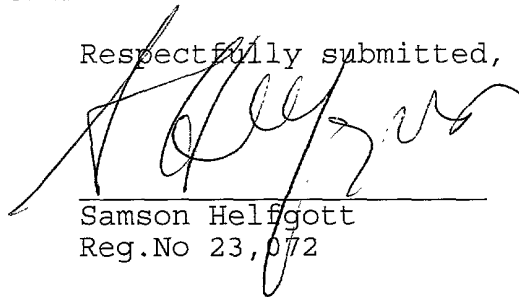

Samson Helfgott  
Reg.No 23,072

HELFGOTT & KARAS, P.C.  
60th FLOOR  
EMPIRE STATE BUILDING  
NEW YORK, NY 10118  
DOCKET NO.: FUJH16.870  
LHH:power

Filed Via Express Mail

Rec. No.: EL522353745 US

On: March 16, 2000

By: Lydia Gonzalez

Any fee due as a result of this paper, not covered  
by an enclosed check may be charged on Deposit  
Acct. No. 08-1634.